

FORM PTO-1300 (Modified)
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES

112740-229

DESIGNATED/ELECTED OFFICE (DO/EO/US)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

CONCERNING A FILING UNDER 35 U.S.C. 371

09/868237

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/DE99/03865

02 December 1999

15 December 1998

TITLE OF INVENTION

METHOD AND COMMUNICATION SYSTEM FOR TRANSMITTING INFORMATION WITH THE
AID OF A MULTICARRIER METHOD

APPLICANT(S) FOR DO/EO/US

Wolfgang Zirwas

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ A copy of the International Search Report (PCT/ISA/210).
8. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
9. ☒ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☒ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ Certificate of Mailing by Express Mail
20. ☒ Other items or information:

Submission of Drawings - Figures 1-2 on two sheets

09868237 "051501

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR <div style="font-size: 1.5em; font-weight: bold;">09/868237</div>	INTERNATIONAL APPLICATION NO. <div style="font-weight: bold;">PCT/DE99/03865</div>	ATTORNEY'S DOCKET NUMBER <div style="font-weight: bold;">112740-229</div>
---	---	--

21. The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO **\$1,000.00**
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO **\$860.00**
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO **\$710.00**
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) **\$690.00**
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) **\$100.00**

ENTER APPROPRIATE BASIC FEE AMOUNT =

\$860.00

\$0.00

CALCULATIONS PTO USE ONLY

Surcharge of **\$130.00** for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)). ☐ 20 ☐ 30

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	22 - 20 =	2	x \$18.00		\$36.00
Independent claims	2 - 3 =	0	x \$80.00		\$0.00
Multiple Dependent Claims (check if applicable).					<input type="checkbox"/> \$0.00
TOTAL OF ABOVE CALCULATIONS =					\$896.00

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). ☐ **\$0.00**

SUBTOTAL = **\$896.00**

Processing fee of **\$130.00** for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). ☐ 20 ☐ 30

TOTAL NATIONAL FEE = **\$896.00**

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☐ **\$0.00**

TOTAL FEES ENCLOSED = **\$896.00**

	Amount to be refunded	\$
	charged	\$

- ☒ A check in the amount of **\$860.00** to cover the above fees is enclosed.
- ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **02-1818** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

William E. Vaughan (Reg. No. 39,056)
 Bell, Boyd & Lloyd LLC
 P.O. Box 1135
 Chicago, Illinois 60690

SIGNATURE

William E. Vaughan

NAME

39,056

REGISTRATION NUMBER

June 15, 2001

DATE

BOX PCT

IN THE UNITED STATES ELECTED/DESIGNATED OFFICE
OF THE UNITED STATES PATENT AND TRADEMARK OFFICE
UNDER THE PATENT COOPERATION TREATY-CHAPTER II

5

PRELIMINARY AMENDMENT

APPLICANT: Wolfgang Zirwas DOCKET NO: 112740-229
SERIAL NO: GROUP ART UNIT:
EXAMINER:
INTERNATIONAL APPLICATION NO: PCT/DE99/03865
INTERNATIONAL FILING DATE: 02 December 1999
INVENTION: METHOD AND COMMUNICATION SYSTEM FOR
TRANSMITTING INFORMATION WITH THE AID OF A
MULTICARRIER METHOD

15

Assistant Commissioner for Patents,
Washington, D.C. 20231

20

Sir:

Please amend the above-identified International Application before entry into
the National stage before the U.S. Patent and Trademark Office under 35 U.S.C. §371
as follows:

25

In the Specification:

Please replace the Specification of the present application, including the
Abstract, with the following Substitute Specification:

S P E C I F I C A T I O N

TITLE

**METHOD AND COMMUNICATION SYSTEM FOR TRANSMITTING
INFORMATION WITH THE AID OF A MULTICARRIER METHOD**

BACKGROUND OF THE INVENTION

Field of the Invention

The present relates, generally, to a method and communication system for transmitting information with the aid of a multicarrier method and, more specifically, to such a method and system wherein maximum utilization of available transmission resources of a transmission medium is achieved during the transmission of information via the transmission medium which has frequency-selective transmission characteristics.

Description of the Prior Art

In wireless communication networks based on radio channels, especially in point-to-multipoint radio feeder networks (also called "radio in the local loop" or, respectively, "RLL"), a number of network terminating units are, in each case, connected to a base station (also called "radio base station" or, respectively "RBS") via one or more radio channels. In telcom report No. 18 (1995), vol. 1 "Drahtlos zum Freizeichen" [Wireless to the ringing tone] page 36, 37, for example, a wireless feeder network for the wireless speech and data communication is described. The communication system described represents an RLL subscriber line in combination with a modern broadband infrastructure, e.g. "fiber to the curb", which can be implemented within a short time and without great expenditure instead of running wire-connected local loops. The network terminating units RNT allocated to the individual subscribers are connected to a higher-level communication network, for example to the ISDN-oriented landline network, via the "radio channel" transmission medium and the base station RBS.

Due to the increasing spread of multimedia applications, high-bit-rate data streams must be transmitted rapidly and reliably via communication networks, especially via wireless communication networks or, respectively, via mobile radio systems, and high demands are made on the radio transmission systems which are based on a transmission medium "radio channel" which is susceptible to interference and difficult to assess with regard to the quality of transmission. A transmission method for transmitting broadband data streams, such as video data streams, is represented by, for example, the OFDM (orthogonal frequency division multiplexing) transmission method based on a so-called multicarrier method. In the

35

methods are used. Although the orthogonality of the subcarriers is retained in its full extent by using the OFDM transmission method when transmitting the transmit signal formed via the "radio channel" transmission medium, both the phase and the amplitude of the transmitted discrete-frequency and frequency-selective transmit signals are changed by the transmission characteristics of the radio channel. The influence of the radio channel on amplitude and phase takes place subcarrier-specifically on the individual subcarriers which in each case have a very narrow bandwidth. In addition, noise signals are additively superimposed on the transmitted useful signal. When coherent demodulation methods are used, a channel estimation is required which depends on considerable technical and economic expenditure for its implementation depending on the quality requirements and which also reduces the performance of the transmission system. Advantageously, differential modulation methods and corresponding incoherent demodulation methods are used in which any elaborate radio channel estimation can be dispensed with. In the case of differential modulation methods, the information to be transmitted is not transmitted directly by selection of the modulation symbols or the discrete-frequency transmit symbols but by changing the discrete-frequency transmit symbols, which are adjacent in time, on the same subcarrier. Examples of differential modulation methods are the 64-level 64-DPSK (differential phase shift keying) and the 64-DAPSK (differential amplitude and phase shift keying) methods. In the 64-DAPSK, both the amplitude and simultaneously the phase are differentially modulated.

In the case of large delay differences between the individual signal paths, i.e. in the case of strong multipath propagation, different transmission-channel-related attenuations may occur between the individual received subcarriers with attenuation differences of up to 20 dB and more. The received subcarriers having high attenuation values or, respectively, the subcarriers having low S/N values (also called the signal power/noise power ratio) have a very large symbol error rate as a result of which the total bit error rate rises considerably over all subcarriers. In the case of subcarriers modulated with the aid of coherent modulation methods, it is

In known methods for improving the transmission quality in multicarrier systems as are known, for example, from the document "Comparison between adaptive OFDM and single carrier modulation with frequency domain equalization", A. Czylik, IEEE Vehicular Technology Conference, USA, New York, vol. Conf. 47, 1997, pp. 865-869, XP000736731, ISBN: 0-77803-3660-7, the transfer function of the channel is estimated via information already transmitted. It is assumed here that the characteristics of the radio channel change only slowly in time. The estimated transfer function is transmitted back to the transmitter from the receiving station via signaling stations.

In a multicarrier method according to US 5 673 290, transmission parameters of a communication line are measured. The modulation method of each carrier is then adapted to the measured parameters.

25 The present invention is thus, directed toward achieving maximum utilization of the available transmission resources of the transmission medium during the transmission of information via a transmission medium having frequency-selective transmission characteristics. In particular, it is intended to achieve maximum utilization of the transmission resources of all multipath
30 components or subcarriers when using a multicarrier method.

SUMMARY OF THE INVENTION

In the method according to the present invention for transmitting information via a transmission medium having certain transmission characteristics with the aid of a multicarrier method, the information to be transmitted is
5 transmitted by a transmit signal having a number of frequency-specific subcarriers to a second unit via the transmission medium. An important aspect of the method according to the present invention is that frequency-selective transmission characteristics of the transmission medium are determined in the first unit and then the frequency-specific subcarriers of the transmit signal are adapted to the
10 frequency-selective transmission characteristics of the transmission medium which have been determined.

A key advantage of the method according to the present invention is that due to the channel equalization at the transmitting end and, respectively, adaptation of the frequency-specific subcarriers of the transmit signal to be sent out at the
15 transmitting end to the frequency-selective transmission characteristics of the transmission medium which have been determined, all subcarriers of the transmit signal transmitted via the transmission medium have the same receive levels or, respectively, signal amplitude values. Thus the same signal power/noise power ratios S/N at the input of the second unit. In consequence, all subcarriers of the
20 transmit signal can be modulated with the same number of modulation levels at the transmitting end so that maximum utilization of the transmission resources of the individual subcarriers of the transmit signal, and thus maximum utilization of the transmission resources of the transmission medium is achieved. Due to the fact that the subcarriers of the transmit signal are modulated with the same number of
25 modulation levels, the expenditure for controlling the modulation and demodulation and, especially, the overhead in transmitting the modulation and demodulation control information, for example via a separate control channel of the transmission medium, is minimized. Advantageously, the frequency-selective channel equalization according to the present invention at the transmitting end prevents the

increase in level of the noise signal duly caused in the case of channel equalization at the receiving end and associated with an increase in bit error probability.

According to an advantageous embodiment of the method according to the present invention, the frequency-selective transmission characteristics of the

transmission medium are determined in the second unit and frequency-specific subcarriers of another transmit signal formed with the aid of a multicarrier method and transmitted from the second unit to the first unit are adapted to the frequency-selective transmission characteristics of the transmission medium which have been determined. By determining the frequency-selective transmission characteristics both in the first unit and in the second unit, the channel equalization of the transmit signal at the transmitting end can be advantageously implemented both in the downstream direction and in the upstream direction, as a result of which the utilization of the available transmission resources of the transmission medium arranged between the first unit and the second unit is further improved.

The frequency-selective transmission characteristics are advantageously determined with the aid of the transmit signal transmitted to the first unit and, respectively, second unit via the transmission medium, in which arrangement at least one subcarrier of the transmit signal is used for transmitting at least one pilot signal. Due to the transmission and evaluation of pilot signals at the receiving end, detection of the transmission characteristics of the transmission medium arranged between the first unit and the second unit can be achieved with little technical and economic expenditure. In particular, the transfer function $H(f)$ of the transmission medium and, in particular, the absolute value of the transfer function $|H(f)|$ can be determined in a particularly simple manner by evaluating received, frequency-selective pilot signals.

The at least one subcarrier of the transmit signal for transmitting the at least one pilot signal is advantageously modulated by a phase modulation method, wherein the pilot signal is a certain reference amplitude. Due to this advantageous embodiment, the subcarriers of the transmit signal utilized for the transmission of pilot signals are additionally used, at least partially, for transmission of useful

information or, respectively, digital data streams. Thus, a further improvement in the utilization of the transmission resources of the transmission medium is achieved.

In the case of transmit signals having a large number of subcarriers, the transmission medium has virtually identical transmission parameters for adjacent subcarriers. According to a further advantageous embodiment of the method according to the present invention, the amplitude-specific and/or phase-specific transmission characteristics of adjacent subcarriers of the incoming transmit signal are averaged for determining the frequency-selective transmission characteristics of the transmission medium. Due to the advantageous averaging over the transmission characteristics of a number of subcarriers, arranged adjacently in the frequency domain, of the transmit signal which have been determined, the number of estimated values, thus the accuracy of the channel estimation at the transmitting end, is two-dimensionally increased without the spectral distance to adjacent subcarriers becoming too large.

In the case of fast time variations of the transmission media exhibiting transmission characteristics or, respectively, in the case of time-variant transmission media, time-selective, amplitude-specific and/or time-selective, phase-specific transmission characteristics of the transmission medium are determined according to a further advantageous embodiment of the method according to the present invention. Pursuant to such method, a number of frequency-selective, amplitude-specific and/or frequency-selective, phase-specific transmission characteristics, which are determined over a period of time, are stored in the respective unit and then the average over the stored frequency-selective, amplitude-specific and/or frequency-selective, phase-specific transmission characteristics is formed. Following this, the frequency-specific subcarriers of the transmit signal are adapted to the transmission characteristics of the transmission medium which are averaged over time. Due to the averaging over a number of frequency-selective transmission characteristics of the transmission medium which have been determined successively in time, the first derivation of the time variations of the transmission

characteristics of the transmission medium is corrected during the detection of the transmission characteristics, which further improves the quality of the channel estimation at the transmitting end and the channel equalization at the transmitting end.

5 The frequency-selective transmission characteristics which have been determined are advantageously transmitted by the first unit to the second unit and the frequency-specific subcarriers of the further transmit signal are adapted to the transmitted transmission characteristics of the transmission medium in the second unit. Due to this advantageous variant of this embodiment, the transmission
10 characteristics of the transmission medium arranged between the first unit and the second unit are only determined in one unit and the result of the determination is transmitted in parameterized form to the second unit as a result of which the expenditure for implementing the channel equalization at the transmitting end is kept low both in the first unit and in the second unit.

15 According to a further advantageous embodiment of the present invention, the signal power/noise power ratio S/N is determined for each subcarrier of the transmit signal in the determination of the frequency-selective transmission characteristics and the subcarriers are used for transmitting information (dsu, dsd) in dependence on the signal power/noise power ratio S/N
20 determined in each case. In the case of a signal power/noise power ratio S/N measured below a limit value, the corresponding subcarrier is advantageously not used for transmitting information. Due to the deactivation of the subcarriers having, in each case, an inadequate signal power/noise power ratio S/N and thus not being usable for information transmission, the transmitting power of the remaining
25 subcarriers used for information transmission can be correspondingly increased. Increasing the transmitting power of the subcarriers used for information transmission further reduces their bit error probability.

Additional features and advantages of the present invention are described in, and will be apparent from, the following Detailed Description of the Preferred
30 Embodiments and the Drawings.

DESCRIPTION OF THE DRAWINGS

Figure 1 shows a centralized transceiver unit implementing an OFDM transmission method; and

Figure 2 shows a decentralized transceiver unit which is connected to a
5 centralized transceiver unit according to Figure 1 via the transmission medium
"radio channel" and implements an OFDM transmission method.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figures 1 and 2 in this case show a first and second transceiver unit SEE1,2
which can be, for example, modular components of transmitting and receiving
10 systems implementing wireless communication networks. In the present exemplary
embodiment, the first transceiver unit SEE1 shown in Figure 1 is arranged in a base
station BS representing the center of a radio cell or of a radio area (not shown) and
the second transceiver unit SSE2 shown in Figure 2 is arranged in a decentralized
wireless network terminating unit RNT representing a wireless subscriber line unit.
15 Figure 2 only shows a wireless network terminating unit RNT as representative of
decentralized network terminating units allocated to the base station BS or,
respectively, the radio cell. To each decentralized wireless network terminating unit
RNT, at least one decentralized communication terminal (not shown) can be
connected which can be constructed, for example, as multimedia communication
20 terminal or as ISDN-oriented telephone terminal. The decentralized wireless
network terminating units RNT and the decentralized communication terminals
connected to them can be connected to a higher-level communication network
connected to the base station BS for example an ISDN-oriented landline network or
a broadband-oriented multimedia communication network (not shown), via the
25 wireless transmission medium "radio channel".

The first transceiver unit SEE1 shown in Figure 1 has a data input ED to
which a digital serial data stream dsd to be transmitted from the higher-level
communication network to the decentralized wireless network terminating units
RNT is conducted. The data input ED is connected to an input EO of an OFDM
30 transmit unit SOB which is arranged in the first transceiver unit SEE1 and in which

a method, already explained in the introduction to the description, for forming an OFDM signal sd having n subcarriers is implemented. The OFDM transmit unit SOB exhibits a modulator MOD which modulates the n subcarriers of the OFDM signal sd and which is connected via n outputs AM1...n and n link lines to n frequency-selective inputs EF1...n, associated with the n subcarriers of the OFDM signal sd, of a transformation unit IFFT for performing a discrete inverse fast Fourier transformation. The transformation unit IFFT is used for generating from the subcarrier-specific modulation symbols or, respectively, transmit symbols SS1...n conducted from a modulator MOD to the frequency-selective inputs EF1...n of the transformation unit IFFT a discrete-time OFDM signal. In the OFDM transmit unit SOB, other units (not shown) such as parallel/serial converters, digital/analog converters, filter units, and amplitude limiters, for converting the discrete-time OFDM signal into the analog OFDM signal sd, for example by adhering to spectrum masks defined for wireless communication networks or mobile radio systems and stipulated by ETSI standardization, are arranged. The OFDM transmit unit SOB is connected via an output AO to an input EH of a radio-frequency transmit unit HS which is connected via an output AH and via an antenna output AS of the first transceiver unit SEE1 to a transmit antenna SA arranged in the external area of the base station BS. The analog OFDM transmit signal sd is amplified by a transmit amplifier, not shown, arranged in the radio-frequency transmit unit HS, is mixed into the radio-frequency or RF band and subsequently transmitted via the transmit antenna SA and via the wireless transmission medium "radio channel" to the decentralized network terminating units RNT arranged in the radio cell of the base station BS (also called the downstream direction).

Furthermore, an OFDM receiving unit EOB is arranged in the first transceiver unit SEE1, which is connected via an input EO to an output AH of a radio-frequency receiving unit HE. The radio-frequency receiving unit HE has an input EH which is connected to a receiving antenna EA arranged in the external area of the base station BS, via an antenna input ES of the first transceiver unit SEE1. An OFDM signal su transmitted by a decentralized network terminating unit

RNT to the base station BS and received at the receiving antenna EA of the base station BS is down converted to the intermediate-frequency band or, respectively, the baseband by a conversion device (not shown) arranged in the radio-frequency receiving unit HE and then forwarded to the input EO of the OFDM receiving unit EOB.

In the OFDM receiving unit EOB, a transformation unit FFT for implementing a discrete fast Fourier transform and having a number of frequency-selective outputs AF1...n is arranged, each frequency-selective output AF1...n being associated with one subcarrier of the received OFDM signal. After previous discretization and digitization with the aid of an analog/digital converter (not shown), the OFDM signal su received and down converted into the intermediate-frequency band or baseband, respectively, is transformed into the frequency domain with the aid of the fast Fourier transform implemented by the transformation unit FFT; i.e., the modulation symbols or receive symbols es1...n of the respective subcarriers contained in the OFDM signal are determined and then forwarded to the corresponding frequency-selective outputs AF1...n of the transformation unit FFT. The outputs AF1...n of the transformation unit FFT are connected to n inputs EM1...n of a demodulator DMOD via n link lines. From the receive symbols es1...n forwarded to the demodulator DMOD from the transformation unit FFT, the corresponding receive code words transmitted via the respective subcarriers are determined with the aid of a demodulation method implemented in the demodulator DMOD. The receive code words which have been determined are then converted with the aid of a parallel/serial converter (not shown), associated with the OFDM receiving unit EOB, into a serial digital data stream deu which is forwarded, for example, to the higher-level communication network via a data output AD of the first transceiver unit SEE1.

The second transceiver unit SEE2, arranged in the decentralized wireless network terminating unit RNT according to Figure 2, has an OFDM receiving unit EON which is connected via an input EO to an output AH of a radio-frequency receiving unit HE arranged in the second transceiver unit SEE2. The radio-frequency receiving unit HE is connected via an input EH to a

receiving antenna EA arranged in the external area of the network terminating unit RNT. The OFDM signal sd transmitted by the base station BS to the network terminating unit RNT and received at the receiving antenna EA is down converted into the intermediate-frequency band or, respectively, the baseband by a conversion device (not shown), arranged in the radio-frequency receiving unit HE, and then forwarded to the input EO of the OFDM receiving unit EON. In the OFDM receiving unit EON, a transformation unit FFT for implementing a discrete fast Fourier transform and exhibiting a number of frequency-selective outputs AF1...n is arranged, each frequency-selective output AF1...n being associated with one subcarrier of the received OFDM signal sd. Using the fast Fourier transform implemented by the transformation unit FFT, the OFDM signal sd received and down converted into the intermediate-frequency band or baseband, respectively, is transformed into the frequency domain after previous discretization and digitization with the aid of an analog/digital converter (not shown); i.e., the modulation symbols or receive symbols es1...n of the respective subcarriers contained in the received OFDM signal sd are determined and then forwarded to the corresponding frequency-selective outputs AF1...n of the transformation unit FFT. The n outputs AF1...n of the transformation unit FFT are connected via n link lines to n inputs EK1...n of a channel estimation unit KS which is connected to corresponding frequency-selective inputs EM1...n of a demodulator DMOD arranged in the OFDM receiving unit EON via n outputs AK1...n and n link lines. The frequency-selective receive symbols es1...n transmitted by the transformation unit FFT to the channel estimation unit KS are forwarded to the inputs EM1...n of the demodulator DMOD. In the channel estimation unit KS, a first evaluating device UF is arranged via which the frequency-selective amplitude-specific transmission channel characteristics of the transmission medium "radio channel" are determined from the receive symbols es1...n conducted to the channel estimation unit KS; i.e., the frequency-selective amplitude distortions (also called amplitude response or absolute value of the transfer function of the radio channel $|H(f)|$) caused by the transmission medium "radio channel" are determined for each subcarrier.

Furthermore, the S/N ratio is determined for each subcarrier from the incoming receive symbols es1...n via a further evaluating device SN arranged in the channel estimation unit KS. From the frequency-selective amplitude response $|H(f)|$ determined and the frequency-selective S/N ratio determined, an information signal is transmitting the results of the determination is generated by a signal generating device (not shown), arranged in the channel estimation unit KS, which information signal is forwarded to a control output SA of the OFDM receiving unit EON via an output ASK of the channel estimation unit KS.

The frequency-selective receive symbols es1...n forwarded to the demodulator DMOD from the channel estimation unit KS are converted into the receive code words transmitted via the respective subcarriers by a demodulation method implemented in the demodulator DMOD. From the receive code words determined, a serial/digital data stream ded is then formed with the aid of a parallel/serial converter (not shown), which is associated with the OFDM receiving unit EON, which data stream is conducted to a data output AS of the second transceiver unit SEE2 via an output AO of the OFDM receiving unit EON and is then transmitted, for example, to a decentralized destination communication terminal, not shown, which is connected to the decentralized network terminating unit RNT.

The control output SA of the second transceiver unit SEE2 arranged in the decentralized network terminating unit RNT is connected via a link line VL to a control input SE of an OFDM transmit unit SON arranged in the second transceiver unit SEE2, in which transmit unit a method for forming an OFDM signal su to be transmitted in the upstream direction and having n subcarriers is implemented. The OFDM transmit unit SON is connected via an input EO to a data input ES of the second transceiver unit SEE2 to which, for example, a digital serial data stream dsu to be transmitted from a decentralized communication terminal via the wireless transmission medium "radio channel" to the higher-level communication network is conducted. The digital serial data stream dsu is divided into n parallel sub-data streams, or converted in parallel form, respectively, by a serial/parallel converter

(not shown), which is associated with the OFDM transmit unit SON, each of the n sub-data streams being allocated to one of the n subcarriers of the OFDM signal. The n parallel sub-data streams are conducted to a modulator MOD arranged in the OFDM transmit unit SON and modulating the n subcarriers of the OFDM signal os , the incoming n sub-data streams being converted into n frequency-selective modulation symbols or transmit symbols $ss1...n$ associated with the n subcarriers of the OFDM signal by a modulation method implemented in the modulator MOD. The n frequency-selective transmit symbols $ss1...n$ formed are forwarded to n outputs $AK1...n$ of the modulator MOD which is connected to n frequency-selective inputs $EE1...n$ of a channel equalizer unit EZ, which are associated with the n subcarriers of the OFDM signal su . The channel equalizer unit EZ has a control input ESS which is connected to the control input SE of the OFDM transmit unit SON and is thus connected to the output ASK of the channel estimation unit KS arranged in the OFDM receiving unit EON via the link line VL.

The channel equalizer unit EZ has capabilities for adapting the transmit symbols $ss1...n$ formed by the modulator MOD and forwarded to the channel equalizer unit EZ to the frequency-selective amplitude-specific transmission channel characteristics of the transmission medium "radio channel" determined in the OFDM receiving unit EON (also called "equalization" of the amplitude response" or "amplitude equalization"); i.e., the amplitudes of the frequency-selective transmit symbols $ss1...n$ are corrected in dependence on the information signal transmitted to the control input ESS. For example, the frequency-selective transmit symbols $ss1...n$ are multiplied by the inverse of the absolute value of the transfer function of the radio channel determined, in this case $1/|H(f)|$. The n corrected frequency-selective transmit symbols $ss'1...n$ are forward to n outputs $AZ1...n$ of the channel equalizer unit EZ which are connected to corresponding n frequency-selective inputs $EF1...n$, allocated to the n subcarriers of the OFDM signal, of a transformation unit IFFT for performing a discrete inverse fast Fourier transformation. Using the transformation unit IFFT, a discrete-time OFDM signal is calculated from the subcarrier-specific and corrected transmit symbols $ss'1...n$

forwarded from the channel equalizer unit EZ to the frequency-selective inputs EF1...n of the transformation unit IFFT. In the OFDM transmit unit SON, further units (not shown), such as parallel/serial converters, digital/analog converters, filter units, and amplitude limiters, for converting the discrete-time OFDM signal into an analog OFDM transmit signal su, for example by adhering to the aforementioned ETSI spectrum masks, are arranged. The OFDM transmit unit SON is connected via an output AO to an input EH of a radio-frequency transmit unit HS which is connected to a transmit antenna SA arranged in the external area of the decentralized network terminating unit RNT via an output AH and via an antenna output AS of the second transceiver unit SEE2. The analog OFDM transmit signal su is amplified by a transmit amplifier, not shown, which is arranged in the radio-frequency transmit unit HF, is converted into the radio-frequency band or RF band and then transmitted to the base station BS via the transmit antenna SA and via the wireless transmission medium "radio channel" in the upstream direction.

It should be noted that the exemplary embodiment described only represents a functional description of the method according to the present invention; i.e., the embodiment of the first and second transceiver unit SEE1,2 described in the exemplary embodiment can also be implemented by alternative variants of the embodiment. For example, the radio-frequency transmitting unit and receiving unit HS, HE arranged in each case in a transceiver unit SEE1,2 can be replaced by a radio-frequency converter unit (not shown), where the respective transmitting and receiving paths are separated via a switch, not shown.

In the text which follows, the method according to the present invention for maximum utilization of the transmission resources provided by the wireless transmission medium "radio channel" is explained in greater detail.

The radio-frequency transmitting and receiving units HS, HE arranged in the first and second transceiver unit SEE1,2 are designed in such a manner that OFDM signals sd, su transmitted in the downstream and upstream direction are transmitted in the TDD (time division duplex) transmission method. In the TDD transmission method, the information to be transmitted between the base station BS

and the wireless decentralized network terminating units RNT are alternately transmitted with the aid of signal bursts of a particular extent in time which are sent out in the same frequency range. In this method, the transceiver units SEE1,2 arranged in the network terminating units RNT and in the base station BS are alternately switched to transmit and receive mode. When the TDD transmission method is used, the wireless transmission medium "radio channel" exhibits reciprocal characteristics. That is, the OFDM signal sd sent out in bursts in the downstream direction by the base station BS and received by a decentralized network terminating unit RNT, it is possible to determine or, respectively, estimate the frequency-selective amplitude-specific and/or phase-specific transmission channel characteristics of the transmission medium "radio channel" for the OFDM signal su to be transmitted in the upstream direction by the decentralized network terminating unit RNT.

According to a first variant of the embodiment of the method according to the present invention, a differential phase modulation method (differential phase shift keying, for example a 64 DPSK), is implemented in the modulator MOD arranged in the OFDM transmit unit SOB of the first transceiver unit SEE1. When a differential modulation method is used, no carrier recovery of the received OFDM signal sd and no precise recovery of the bit clock is required in the subsequent demodulation in the corresponding OFDM receiving unit EON or, respectively, the demodulator DMOD arranged therein. To provide for a determination of the frequency-selective transmission characteristics of the transmission medium "radio channel", also called channel estimation in the text which follows, at the receiving end, the modulator MOD arranged in the base station BS is designed in such a manner that a particular number of the transmit symbols ss1...n present at the n outputs AM1...n of the modulator MOD are designed as pilot symbols with defined reference amplitude; i.e., some of the subcarriers of the OFDM signal sd to be transmitted in the downstream direction are used for transmitting in each case a pilot tone or pilot signal having a defined reference amplitude. For example, 10% of

the subcarriers of the OFDM signal s_d , which can be used for information transmission, are used for transmitting pilot tones.

From the OFDM signal received at the receiving antenna EA of the network terminating unit RNT, the transmitted receive symbols $es_{1...n}$ of the respective subcarriers of the received OFDM signal sd are determined by the transformation unit FFT arranged in the OFDM receiving unit EON and forwarded to the channel estimation unit KS.

From the receive symbols $es1...n$ present at the inputs $EK1...n$ and designed as pilot symbols, the frequency-selective, amplitude-specific transmission characteristics or frequency-selective attenuation characteristics of the transmission medium "radio channel" FK arranged between the base station BS and the decentralized wireless network terminating unit RNT are determined. That is, the amplitude response or absolute value of the transmission function $|H(f)|$ of the transmission medium "radio channel" FK is determined by the first evaluating device HF arranged in the channel estimation unit KS. With the aid of the information signal is, the transmission characteristics of the transmission medium "radio channel" FK which have been determined are then transmitted to the control input SE of the OFDM transmitting unit SON arranged in the decentralized network terminating unit RNT via the link line VL. Furthermore, the receive symbols $es1...n$ forwarded from the channel estimation unit KS to the n inputs $EM1...n$ of the demodulator DMOD are converted in the OFDM receiving unit EON, with the aid of the differential or, respectively, incoherent demodulation method implemented in the demodulator DMOD, into the receive code words transmitted via the respective subcarriers of the OFDM signal sd , from which code words the serial digital data stream ded conducted to the output AS of the second transceiver unit SEE2 is formed.

According to the present invention, the OFDM signal to be transmitted to the base station BS in the upstream direction is generated depending on the transmission channel characteristics of the transmission medium "radio channel" determined by the OFDM receiving unit EON and forwarded to the OFDM

transmitting unit SON. For this purpose, the digital serial data stream dsu received at the input EO of the OFDM transmitting unit SON arranged in the second transceiver unit SEE2 and to be transmitted to the base station BS is converted into parallel form and converted into the transmit symbols ss1...n associated with the n subcarriers of the OFDM signal, with the aid of the modulator MOD. The transmit symbols ss1...n formed are forwarded to the n inputs EE1...n of the channel equalizer unit EZ and adapted to the frequency-selective amplitude-specific transmission channel characteristics of the transmission medium "radio channel" FK, which have been determined by the correction device 1/HF arranged in the equalizer unit (also called amplitude equalization at the transmitting end). The amplitude equalization at the transmitting end implemented by the correction device 1/HF takes place in such a manner that the transmit symbols ss1...n of the individual subcarriers of the OFDM signal su are multiplied by a factor representing the absolute value of the inverse of the transfer function $H_n(f)$ determined. In this case, $1/|H_n(f)|$ for $0 \leq n \leq N-1$, wherein n represents the length of the Fourier transform implemented in the transformation unit IFFT and $H_n(f)$ represents the transfer function of the nth subcarrier of the OFDM signal.

The frequency-selective amplitude equalization according to the present invention, at the transmitting end, which has been described, has the effect that all subcarriers of the OFDM signal su transmitted to the base station BS from the decentralized network terminating unit RNT in the upstream direction have the same receive levels or signal amplitude values when they arrive at the receiving antenna EA of the base station BS. Since all subcarriers of the OFDM signal su received in the base station BS have the same receive level, the signal power/noise power ratio S/N is identical for all subcarriers. Thus, all subcarriers can be modulated with the same number of modulation levels at the transmitting end; i.e., with the aid of the OFDM transmitting unit SON arranged in the decentralized network terminating unit RNT or, respectively, with the aid of the modulator MOD arranged there. This achieves maximum utilization of the transmission resources of the individual subcarriers of the OFDM signal su. For example, if the decentralized

network terminating units RNT are arranged close to the base station BS, the individual subcarriers of the OFDM signal su to be transmitted to the base station BS in the upstream direction can be modulated with the aid of the 64-QAM (quadrature amplitude modulation). As the distance between the decentralized network terminating unit RNT and the base station BS increases, i.e. with increasing attenuation characteristics of the transmission medium "radio channel" FK, the number of modulation levels is reduced. Due to the identical S/N ratio of the subcarrier of the OFDM signal su received in the base station BS, no subcarrier-individual number of modulation levels is required for controlling the demodulation of the received OFDM signal so that the control effort for modulating and demodulating the OFDM signal su is advantageously minimum. By avoiding the requirement of subcarrier-individual number of modulation levels, no additional overhead is generated for transmitting additional control information controlling the subcarrier-individual modulation and demodulation, thus preventing the transmission capacity of the transmission medium "radio channel" from being reduced.

As an alternative, the transmission power of the OFDM signal su to be sent out can be correspondingly reduced instead of increasing the number of modulation levels of the OFDM signal su to be sent in the upstream direction. The transmission power can be lowered, for example, in the radio-frequency transmit unit HS of the decentralized network terminating unit RNT. Lowering the transmission power minimizes the mutual interference of the subcarriers of OFDM signals sd, su sent within a radio cell, also called intercell interference (ICI) and, as a result, the transmission capacity of the total system arranged within a radio cell is increased.

According to a further advantageous variant of the embodiment of the method according to the present invention, the channel estimation unit KS of the OFDM receiving unit EON arranged in the decentralized network terminating unit RNT has a further evaluating device SN for detecting the subcarrier-individual S/N ratios of the respective subcarriers of the received OFDM signal sd. The subcarrier-individual S/N ratios detected in each case with the aid of the further evaluating

device S/N are additionally transmitted, in addition to the detected amplitude-specific transmission characteristics $H(f)$ of the transmission medium FK with the aid of the information signal is via the link line VL to the OFDM transmitting unit SON arranged in the decentralized network terminating unit RNT or, respectively, to the channel equalizer unit EZ arranged there.

In the channel equalizer unit EZ a further correction device, (not shown here), is arranged via which the subcarriers having unfavorable S/N ratios or the subcarriers having an S/N ratio which is measured below a limit value, are deactivated in dependence on the S/N ratios transmitted to the control input ESS, and thus are not used for information transmission. For example, in the case of decentralized network terminating units RNT which are at a large distance from the base station BS, only every second or fourth subcarrier of the OFDM signal s_u to be sent to the base station BS is used for information transmission, the transmission power of the subcarriers used for information transmission being correspondingly increased. Increasing the transmission power of the subcarriers used for information transmission further reduces the bit error probability. Deactivated subcarriers of the received OFDM signal can be detected by simple amplitude calculation in the OFDM receiving unit EON, EOB.

Since the determination of the frequency-selective amplitude-specific transmission characteristics of the transmission medium "radio channel" FK, implemented in the decentralized network terminating unit RNT at the transmitting end, only requires the evaluation of the amplitude value of the pilot symbols or pilot tones transmitted from the base station BS to the decentralized network terminating unit RNT by the channel estimation unit KS arranged in the decentralized network terminating unit RNT, the phase information of the pilot symbols or pilot tones of the OFDM signals s_d , sent from the base station BS to the decentralized network terminating unit RNT, can be additionally used for transmitting the digital information s_{ds} . The subcarriers of the OFDM signal s_d which transmits pilot symbols or pilot tones can be modulated, for example, with the aid of an absolute or differential phase modulation method with defined

reference amplitude as a result of which an advantageous utilization of the transmission capacity of the transmission medium "radio channel" is achieved.

The OFDM transmission units SOB, SON arranged in the base station BS or decentralized network terminating unit RNT or, respectively, the modulators MOD
5 arranged there, are designed in such a manner that the subcarriers of the OFDM signals s_d , s_u which are not used for the transmission of pilot tones are modulated with a coherent or absolute modulation method, for example an m-level QAM, since m-level QAM modulation methods can also be used in transmission media with unfavorable S/N ratios.

10 When coherent m-level modulation methods are used, additional methods (not shown) for the channel estimation or channel equalization at the receiving end, required according to the prior art, especially for phase equalization of the subcarriers received in each case of the received OFDM signal s_d , s_u are required in the corresponding OFDM receiving units EON, EOB arranged in the base station
15 BS and, respectively, the decentralized network terminating unit RNT. To provide for correction of the phase angles of the incoming subcarriers in the OFDM receiving unit EON, EOB, the first subcarrier of the OFDM signal s_d , s_u is transmitted with a defined phase, e.g. $\varphi = 0$ degrees, by the OFDM transmitting unit SOB, SON. The phase of the first subcarrier is rotated by, for example, $\Delta\varphi$ by the
20 transmission medium "radio channel" FK. The second subcarrier arranged closely adjacently to the first subcarrier is also rotated by $\Delta\varphi$ in this process. To restore the original phase angles of the transmitted OFDM signal s_d , s_u , the second subcarrier must be multiplied by the complex factor $e^{j\Delta\varphi}$ by the correction device arranged in the OFDM receiving unit EON, EOB. The phase shift $\Delta\varphi$ of the first subcarrier
25 caused by the transmission medium "radio channel" FK can be detected, and the phase angle of the adjacent second subcarrier of the received OFDM signal can be correspondingly corrected with the aid of the correction device due to the pilot tone with defined transmitting phase transmitted via the first subcarrier. After the correction of the phase angle or phase equalization at the receiving end, the
30 information transmitted via the second subcarrier is decided with the aid of the

demodulator. The phase shift of the second subcarrier is determined in dependence on the result of the decision. The phase angle of the third subcarrier is then corrected in the manner described via the phase shift of the second subcarrier determined, etc.

- 5 According to a further advantageous embodiment of the method according to the present invention, the OFDM receiving unit EOB arranged in the base station BS also has a channel estimation unit KS, not shown, via which the receive symbols $es_1 \dots n$ transmitted with the aid of the received OFDM signal su are evaluated and, from this, the frequency-selective, amplitude-specific radio channel characteristics of the transmission medium "radio channel" FK are evaluated in the manner described and are transmitted via a link line (not shown), to a further channel equalizer unit (not shown), which is arranged in the OFDM transmitting unit SOB of the base station BS. Due to this advantageous embodiment, the OFDM signals sd to be transmitted to the decentralized network terminating units RNT
- 10 from the base station BS in the downstream direction, and the subcarriers contained therein, can also be adapted to the transmission characteristics of the transmission medium "radio channel". The equalization of the amplitude response at the transmitting end achieved in this manner, both in the downstream direction and in the upstream direction, further improves the utilization of the transmission capacity
- 15 of the transmission medium "radio channel" FK. However, this presupposes that some of the subcarriers of the OFDM signal su to be transmitted from the decentralized network terminating unit RNT to the base station BS are used for transmitting pilot symbols or pilot tones as already described. The modulator MOD arranged in the OFDM transmitting unit SON of the decentralized network
- 20 terminating unit RNT is advantageously designed in such a manner that the subcarriers of the OFDM signal su which are used for the transmission of pilot symbols are modulated with the aid of a phase modulation method, for example a QPSK modulation method, with defined reference transmit amplitude. By using phase modulation, the pilot symbols or pilot tones transmitted in the upstream
- 25 direction are also at least partially used for transmitting the digital data stream dsu .
- 30

To increase the accuracy of channel estimation in the decentralized network terminating unit RNT and possibly in the base station BS, the subcarriers of an OFDM signal s_d , s_u which, in each case, transmit pilot tones or pilot symbols can be transmitted with increased power.

- 5 According to a further variant of the embodiment, the channel estimation at the transmitting end is only performed by the channel estimation unit KS arranged in the decentralized network terminating unit RNT and then the frequency-selective, amplitude-specific transmission characteristics of the transmission medium "radio channel" which have been determined are transmitted in
10 parameterized form to the base station BS or, respectively, the OFDM transmitting unit SOB arranged there. The equalization of the amplitude response of the subcarriers of the OFDM signal s_d to be transmitted in the downstream direction from the base station BS is carried out by a channel equalizer unit (not shown), which is arranged in the OFDM transmitting unit SOB of the base station BS, with
15 the aid of the parameterized transmission characteristics transmitted.

Advantageously, only the changes of the transmission characteristics with time are transmitted to the base station BS and thus the overhead during the transmission of the transmission characteristics is minimized.

- In the case of OFDM signals s_d , s_u , having a large number of subcarriers,
20 the transmission medium "radio channel" FK has virtually identical transmission characteristics for adjacent subcarriers. Advantageously, in addition to the directly adjacent subcarriers, the adjoining subcarriers in the frequency range are also taken into consideration for the determination of the frequency-selective transmission characteristics of the transmission medium or the channel estimation at the
25 transmitting end performed in an OFDM receiving unit EON, EOB; i.e., an average is formed over determined transmission characteristics of a number of subcarriers arranged adjacently in the frequency range. The averaging has the advantage that the number of estimated values, and thus the accuracy of the channel estimation at the transmitting end is two-dimensionally increased without the spectral distance
30 from adjacent subcarriers becoming too great.

- According to a further advantageous embodiment of the method according to the present invention, in the case of radio channels exhibiting a fast change with time (also called time-variant transmission channels or radio channels), the OFDM signals following in time; i.e., those received at the receiving antenna EA within a certain period of time or, respectively, the receive symbols es1...n contained therein, are also taken into consideration in the channel estimation implemented in the channel estimation unit KS. Implementation of this variant of the embodiment requires the storing of the receive symbols es1...n received successively in time or storing of the frequency-selective transmission characteristics determined in each case, in a memory, not shown, which is arranged in the first or second transceiver unit SEE1, 2. Averaging over a number of receive symbols es1...n in each case belonging to a subcarrier and received successively in time, within the channel estimation at the transmitting end performed in the channel estimation unit KS corrects the first generation of the changes with time of the transmission characteristics of the transmission medium "radio channel" FK during the detection of the transmission characteristics. Advantageously, the subcarriers arranged symmetrically about the current subcarrier in the frequency domain or, respectively, the receive symbols es1...n transmitted via this subcarrier, are taken into consideration during the averaging. As an alternative, the averaging can also be done in the channel equalizer unit EZ of the OFDM transmitting unit SON.

- The determination of the frequency-selective, amplitude-specific transmission characteristics of the transmission medium "radio channel" FK, performed with the aid of the evaluating device H(f) in the channel estimation unit KS, also called calculation of the estimated amplitude values, is relatively complex.
- The amplitude values of all received receive symbols es1...n of an OFDM signal sd are calculated following the calculation rule

$$\sqrt{I^2 + Q^2} = \text{Amplitude}$$

where I is the imaginary part and Q is the real part of a received complex receive signal es1...n. The respective frequency-selective estimated amplitude values can be calculated serially, at least partially, so that the technical complexity or hardware complexity for calculating the estimated amplitude values is kept low.

5 According to an advantageous embodiment, the estimated amplitude values are calculated from the frequency-selective receive symbols es1...n received in each case, with the aid of values stored in a table called look-up table. For this purpose, the receive values of the imaginary part I and of the real part Q of a receive symbol es1...n, which are in each case possible, are combined to form a table address and
10 are stored in the look-up table. Furthermore, to each stored table address, the associated correction factor, $1/|H_n(f)|$ in this case, is allocated and stored in the corresponding table entry. The correction factors allocated to the respective table addresses represent the values by which the respective transmit symbols ss1...n of the OFDM signal sd, su to be sent out are multiplied. The extent or, respectively,
15 number of entries of the look-up table is advantageously kept small if it is restricted to one quadrant of the complex plane, transmit symbols ss1...n having negative imaginary and real part values being inverted before the amplitude equalization at the transmitting end.

 According to a further advantageous embodiment, the multiplication of the
20 subcarriers or, respectively, of the transmit symbols ss1...n to be transmitted via the subcarriers, by the correction factor determined, $1/|H_n(f)|$ in this case, is implemented by an addition or, respectively, subtraction with values also stored in a look-up table. This advantageous embodiment further reduces the computing effort for correcting the transmit symbols during the amplitude equalization.

25 Although the present invention has been described with reference to specific embodiments, those of skill in the art will recognize that changes may be made thereto without departing from the spirit and scope of the invention as set forth in the hereafter appended claims.

ABSTRACT OF THE DISCLOSURE

To transmit information with the aid of a transmit signal exhibiting a number of frequency-specific subcarriers from a first unit to a second unit via a transmission medium, the frequency-selective transmission characteristics of the transmission medium are determined in the first unit and then the subcarriers of the transmit signal are adapted to the transmission characteristics determined. All subcarriers of the transmit signal can be advantageously modulated with the same number of modulation levels as a result of which maximum utilization of the transmission resources of the transmission medium is achieved.

In the claims:

On page 30, cancel line 1, and substitute the following left-hand justified heading therefor:

I Claim as My Invention:

Please cancel claims 1-22, without prejudice, and substitute the following claims therefor:

23. A method for transmitting information via a transmission medium having particular transmission characteristics, with the aid of a multicarrier method, from a first unit to a second unit, the method comprising the steps of:

using a first transmit signal to transmit the information, the first transmit signal exhibiting a plurality of frequency-specific subcarriers;

determining, in the first unit, frequency-selective transmission characteristics of the transmission medium using a second transmission signal sent out by the second unit, the second transmission signal exhibiting at least one frequency-specific subcarrier; and

adapting, in the first unit, the plurality of frequency-specific subcarriers of the first transmit signal to the frequency-selective transmission characteristics of the transmission medium which have been determined.

24. A method for transmitting information as claimed in claim 23, the method further comprising the steps of:

determining, in the second unit, the frequency-selective transmission characteristics of the transmission medium;

adapting, in the second unit, to the frequency-selective transmission characteristics of the transmission medium which have been determined, a plurality
5 of frequency-specific subcarriers of the second transmit signal formed with the aid of a multicarrier method and transmitted from the second unit to the first unit.

25. A method for transmitting information as claimed in claim 24, further comprising the step of:
10 determining at least one of frequency-selective amplitude-specific transmission characteristics and frequency-selective phase-specific transmission characteristics of the transmission medium as the transmission characteristics.

26. A method for transmitting information as claimed in claim 25, the
15 method further comprising the step of:
determining a transfer function of the transmission medium during the step of determining the frequency-selective transmission characteristics of the transmission medium.

27. A method for transmitting information as claimed in claim 26, the
20 method further comprising the step of:
representing the frequency-selective amplitude-specific transmission characteristics of the transmission medium by an absolute value of the transfer function which has been determined.

28. A method for transmitting information as claimed in claim 23, the
25 method further comprising the steps of:
determining the frequency-selective transmission characteristics using both the first and second transmit signals; and

utilizing at least one subcarrier of one of the first and second transmit signals for transmitting at least one pilot signal.

29. A method for transmitting information as claimed in claim 28, the
5 method further comprising the step of:
modulating the at least one subcarrier using a phase modulation method for transmitting the at least one pilot signal, wherein the pilot signal exhibits a particular reference amplitude.

10 30. A method for transmitting information as claimed in claim 25, the method further comprising the step of:
averaging at least one of the frequency-selective amplitude-specific transmission characteristics and the frequency-selective phase-specific transmission characteristics of adjacent subcarriers of one of the first and second transmit signals
15 for determining the frequency-selective transmission characteristics of the transmission medium.

31. A method for transmitting information as claimed in claim 25, the method further comprising the steps of:
20 determining at least one of time-selective amplitude-specific transmission characteristics and time-selective phase-specific transmission characteristics of the transmission medium;
storing a plurality of the frequency-selective amplitude-specific transmission characteristics and frequency-selective phase-specific transmission
25 characteristics, determined over a period of time, in the respective one of the first and second units;
forming, in each case, an average value of the at least one of the stored frequency-selective amplitude-specific transmission characteristics and the frequency-selective phase-specific transmission characteristics; and

42. A communication system for transmitting information, comprising:
a first unit;
a second unit; and
a transmission medium having particular transmission characteristics, the
5 transmission medium connecting the first and second units for the transmission of
information between the first and second units;

wherein the first unit includes a converter for converting, using a
multicarrier method, the information to be transmitted into a first transmit signal
having a plurality of frequency-specific subcarriers, a transmitter for transmitting
10 the transmit signal via the transmission medium to the second unit, an evaluator for
determining frequency-selective transmission characteristics of the transmission
medium, and an adapter for adapting the frequency-specific subcarriers of the
transmit signal to the frequency-selective transmission characteristics of the
transmission medium.

43. A communication system as claimed in claim 42, wherein the
second unit further includes a converter for converting, using a multicarrier method,
the information to be transmitted into a second transmit signal exhibiting a plurality
of frequency-specific subcarriers, an evaluator for determining the frequency-
15 selective transmission characteristics of the transmission medium, an adapter for
adapting the frequency-specific subcarriers of the second transmit signal to the
frequency-selective transmission characteristics of the transmission medium which
have been determined, and a transmitter for transmitting the second transmit signal
via the transmission medium to the first unit.

44. A communication system as claimed in claim 42, wherein the
evaluator is designed such that at least one of frequency-selective amplitude-
specific transmission characteristics and frequency-selective phase-specific
transmission characteristics of the transmission medium are determined as the
20 transmission characteristics.

REMARKS


The present amendment makes editorial changes and corrects typographical errors in the specification, which includes the Abstract, in order to conform the specification to the requirements of United States Patent Practice. No new matter is added thereby. Attached hereto is a marked-up version of the changes made to the specification by the present amendment. The attached page is captioned "**Version With Markings To Show Changes Made**".

In addition, the present amendment cancels original claims 1-22 in favor of new claims 23-44. Claims 23-44 have been presented solely because the revisions by red-lining and underlining which would have been necessary in claims 1-22 in order to present those claims in accordance with preferred United States Patent Practice would have been too extensive, and thus would have been too burdensome.

The present amendment is intended for clarification purposes only and not for substantial reasons related to patentability pursuant to 35 USC §§103, 102, 103 or 112. Indeed, the cancellation of claims 1-22 does not constitute an intent on the part of the Applicants to surrender any of the subject matter of claims 1-22.

Early consideration on the merits is respectfully requested.

Respectfully submitted,



William E. Vaughan
Bell, Boyd & Lloyd LLC
P.O. Box 1135
Chicago, Illinois 60690-1135
(312) 807-4292
Attorneys for Applicants

(Reg. No. 39,056)

VERSIONS WITH MARKINGS TO SHOW CHANGES MADE

In The Specification:

The Specification of the present application, including the Abstract, has been amended as follows:

SPECIFICATION

TITLE

- 5 **~~Method and communication arrangement for transmitting information with
the aid of a multicarrier method~~**

METHOD AND COMMUNICATION SYSTEM FOR TRANSMITTING INFORMATION WITH THE AID OF A MULTICARRIER METHOD

BACKGROUND OF THE INVENTION

- 10 **Description**

Field of the Invention

The present relates, generally, to a method and communication system for
transmitting information with the aid of a multicarrier method and, more
specifically, to such a method and system wherein maximum utilization of available
15 transmission resources of a transmission medium is achieved during the
transmission of information via the transmission medium which has frequency-
selective transmission characteristics.

Description of the Prior Art

- 20 In wireless communication networks based on radio channels, especially in
point-to-multipoint radio feeder networks (also called "radio in the local loop" or,
respectively, "RLL"), a number of network terminating units are, in each case,
connected to a base station (also called "radio base station" or, respectively "RBS")
via one or more radio channels. In telcom report No. 18 (1995), vol. 1 "Drahtlos
zum Freizeichen" [Wireless to the ringing tone] page 36, 37, for example, a
25 wireless feeder network for the wireless speech and data communication is
described. The communication system described represents an RLL subscriber line
in combination with a modern broadband infrastructure, e.g. "fiber to the curb",
which can be implemented within a short time and without great expenditure

instead of running wire-connected local loops. The network terminating units RNT allocated to the individual subscribers are connected to a higher-level communication network, for example to the ISDN-oriented landline network, via the "radio channel" transmission medium and the base station RBS.

5 Due to the increasing spread of multimedia applications, high-bit-rate data streams must be transmitted rapidly and reliably via communication networks, especially via wireless communication networks or, respectively, via mobile radio systems, and high demands are made on the radio transmission systems which are based on a transmission medium "radio channel" which is susceptible to

10 interference and difficult to assess with regard to the quality of transmission. A transmission method for transmitting broadband data streams, ~~e.g.,~~ such as video data streams, is represented by, for example, the OFDM (orthogonal frequency division multiplexing) transmission method based on a so-called multicarrier method. In the OFDM transmission technology, the information to be transferred
15 or, respectively, the data stream to be transferred is divided or, respectively, converted to parallel form, to a number of sub-channels or subcarriers within the radio channel, ~~the~~ The information to be transferred in each case being transmitted at a relatively low data rate but in parallel in relatively superimposed form. The OFDM transmission technology is used, for example, in digital terrestrial radio
20 (also called digital audio broadcasting DAB) and for digital terrestrial television (also called digital terrestrial video broadcasting DTVB).

The OFDM transmission method is described in greater detail in the printed document "Mitteilungen der TU-Braunschweig, Mobilfunktechnik für Multimedia-Anwendungen" (Information as the Braunschweig technical university, mobile
25 radio technology for multimedia applications), Professor H. Rohling, volume XXXI, issue 1-1996, in figure 6, page 46. In this method, a serial/parallel conversion is performed for the modulation of ~~the~~, for example the, n subcarriers on the basis of a serial data stream in the transmitter, a binary code word with word length k (the word length k is being dependent on the modulation method used)
30 being formed in each case for the i th OFDM block in time with block length T and

the j th subcarrier. From the code words formed, the corresponding complex modulation symbols, also called transmit symbols in the text which follows, are formed with the aid of a transmitter-specific modulation method, wherein one transmit symbol being is allocated to each of the k subcarriers at any time i . The spacing of the individual subcarriers is defined by $\Delta f = 1/T'$ which guarantees that the individual subcarrier signals are orthogonal within the useful interval $[0, T']$. By multiplying the oscillations of the individual subcarriers by the corresponding modulation symbols or transmit symbols and subsequently adding the modulation products formed, the corresponding discrete-time transmit signal is generated for the i th OFDM block in time. This transmit signal is calculated in sampled, i.e. in discrete-time form by an inverse discrete Fourier transform (IDFT) directly from the modulation symbols or transmit symbols of the individual subcarriers considered. To minimize intersymbol interferences, each OFDM block is preceded by a guard interval T_G in the time domain which causes an extension of the discrete-time OFDM signal in the interval $[-T_G, 0]$; compare "Mitteilungen der TU-Braunschweig, Mobilfunktechnik für Multimedia-Anwendungen", figure 7. The inserted guard interval T_G advantageously corresponds to the maximum delay difference occurring between the individual propagation paths occurring during the radio transmission. By removing the added guard interval T_G at the receiver end, a disturbance of the i th OFDM block by, for example, the adjacent OFDM signal in time at time $i-1$ is avoided, so that the transmit signal is received in interval $[0, T']$ over all indirect paths and the orthogonality between the subcarriers is retained to its full extent in the receiver. In the case of a large number of subcarriers, for example $n = 256$ subcarriers, and correspondingly long symbol periods $T = T' + T_G$, the period T_G is small compared with T so that the insertion of the guard interval effectively does not significantly impair the bandwidth and only a small overhead is produced. After the transmit signal received at the input of the receiver is sampled in the baseband by an A/D converter, and after the useful interval has been extracted, i.e. after the guard interval T_G has been eliminated, the received transmit signal is transformed into the frequency domain with the aid of a discrete Fourier

transform (DFT); i.e., the received modulation symbols or, respectively, the received receive symbols are determined. From the receive symbols determined, the corresponding receive code words are generated ~~by means of~~ via a suitable demodulation method, and from these, the received serial data stream is formed by
5 parallel/serial conversion. Avoiding intersymbol interference in OFDM transmission methods considerably reduces the computing effort in the respective receiver as a result of which the OFDM transmission technology is used, for example, for the terrestrial transmission of digital television signals; for example, ~~for the transmission of broadband data streams with a transmission rate of~~
10 34 Mbit/s per radio channel.

To transmit the serial data stream to be transmitted with the aid of the OFDM transmission method, absolute or, respectively, differential modulation methods and corresponding coherent or, respectively, incoherent, demodulation methods are used. Although the orthogonality of the subcarriers is retained in its
15 full extent by using the OFDM transmission method when transmitting the transmit signal formed via the "radio channel" transmission medium, both the phase and the amplitude of the transmitted discrete-frequency and frequency-selective transmit signals are changed by the transmission characteristics of the radio channel. The influence of the radio channel on amplitude and phase takes place subcarrier-
20 specifically on the individual subcarriers which in each case have a very narrow bandwidth; ~~in~~ In addition, noise signals are additively superimposed on the transmitted useful signal. When coherent demodulation methods are used, a channel estimation is required which depends on considerable technical and economic expenditure for its implementation depending on the quality requirements and
25 which also reduces the performance of the transmission system. Advantageously, differential modulation methods and corresponding incoherent demodulation methods are used in which any elaborate radio channel estimation can be dispensed with. In the case of differential modulation methods, the information to be transmitted is not transmitted directly by selection of the modulation symbols or the
30 discrete-frequency transmit symbols but by changing the discrete-frequency

transmit symbols, which are adjacent in time, on the same subcarrier. Examples of differential modulation methods are the 64-level 64-DPSK (differential phase shift keying) and the 64-DAPSK (differential amplitude and phase shift keying) methods. In the 64-DAPSK, both the amplitude and simultaneously the phase are differentially modulated.

In the case of large delay differences between the individual signal paths, i.e. in the case of strong multipath propagation, different transmission-channel-related attenuations may occur between the individual received subcarriers, with attenuation differences of up to 20 dB and more. The received subcarriers having high attenuation values or, respectively, the subcarriers having low S/N values (also called the signal power/noise power ratio) have a very large symbol error rate as a result of which the total bit error rate rises considerably over all subcarriers. In the case of subcarriers modulated with the aid of coherent modulation methods, it is already known to correct the attenuation losses caused by the frequency-selective transmission characteristics of the transmission medium (also called the transfer function $H(f)$) with the aid of the inverse transfer function (also called $1/H(f)$) at the receiving end, ~~the~~ The frequency-selective attenuation losses ~~being are then~~ determined, for example, by evaluating reference pilot tones transmitted and in each case are allocated to certain subcarriers. This method for equalizing the transmission channel at the receiving end, however, causes a great increase in noise in the subcarriers with low S/N values. The bit error rate caused by the increase in noise in subcarriers with low S/N values cannot even be improved by introducing channel coding so that the total transmission channel capacity of the frequency-selective transmission medium, which is possible over all subcarriers, is not achieved in spite of equalization of the transmission channel at the receiving end.

In known methods for improving the transmission quality in multicarrier systems as are known, for example, from the document "Comparison between adaptive OFDM and single carrier modulation with frequency domain equalization", A. Czyłwik, IEEE Vehicular Technology Conference, USA, New York, vol. Conf. 47, 1997, pp. 865-869, XP000736731, ISBN: 0-77803-3660-7, the

transfer function of the channel is estimated ~~by means of~~ via information already transmitted. It is assumed here that the characteristics of the radio channel change only slowly in time. The estimated transfer function is transmitted back to the transmitter from the receiving station via signaling stations.

5 In a multicarrier method according to US 5 673 290, transmission parameters of a communication line are measured. The modulation method of each carrier is then adapted to the measured parameters.

The present invention is ~~based on the object of~~ thus, directed toward achieving maximum utilization of the available transmission resources of the transmission medium during the transmission of information via a transmission medium having frequency-selective transmission characteristics. In particular, it is intended to achieve maximum utilization of the transmission resources of all multipath components or subcarriers when using a multicarrier method. ~~The object is achieved on the basis of a method and a communication arrangement according to the features of the preamble of claims 1 and 20 by their characterizing features.~~

10

15

SUMMARY OF THE INVENTION

In the method according to the present invention for transmitting information via a transmission medium having certain transmission characteristics with the aid of a multicarrier method, the information to be transmitted is transmitted by a transmit signal having a number of frequency-specific subcarriers, to a second unit via the transmission medium. ~~The essential~~ An important aspect of the method according to the present invention ~~consists in~~ is that frequency-selective transmission characteristics of the transmission medium are determined in the first unit and then the frequency-specific subcarriers of the transmit signal are adapted to the frequency-selective transmission characteristics of the transmission medium which have been determined.

20

25

~~The essential~~ A key advantage of the method according to the present invention ~~consists in~~ is that due to the channel equalization at the transmitting end and, respectively, adaptation of the frequency-specific subcarriers of the transmit signal to be sent out at the transmitting end to the frequency-selective transmission

30

characteristics of the transmission medium which have been determined, all subcarriers of the transmit signal transmitted via the transmission medium have the same receive levels or, respectively, signal amplitude values, and thus Thus the same signal power/noise power ratios S/N at the input of the second unit. In consequence, all subcarriers of the transmit signal can be modulated with the same number of modulation levels at the transmitting end so that maximum utilization of the transmission resources of the individual subcarriers of the transmit signal, and thus maximum utilization of the transmission resources of the transmission medium is achieved. Due to the fact that the subcarriers of the transmit signal are modulated with the same number of modulation levels, the expenditure for controlling the modulation and demodulation and, especially, the overhead in transmitting the modulation and demodulation control information, for example via a separate control channel of the transmission medium, is minimized. Advantageously, the frequency-selective channel equalization according to the present invention at the transmitting end prevents the increase in level of the noise signal duly caused in the case of channel equalization at the receiving end and associated with an increase in bit error probability.

According to an advantageous embodiment of the method according to the present invention, the frequency-selective transmission characteristics of the transmission medium are determined in the second unit and frequency-specific subcarriers of another transmit signal formed with the aid of a multicarrier method and transmitted from the second unit to the first unit are adapted to the frequency-selective transmission characteristics of the transmission medium which have been determined claim 2. By determining the frequency-selective transmission

characteristics both in the first unit and in the second unit, the channel equalization of the transmit signal at the transmitting end can be advantageously implemented both in the downstream direction and in the upstream direction, as a result of which the utilization of the available transmission resources of the transmission medium arranged between the first unit and the second unit is further improved.

5 The frequency-selective transmission characteristics are advantageously determined with the aid of the transmit signal transmitted to the first unit and, respectively, second unit via the transmission medium, in which arrangement at least one subcarrier of the transmit signal is used for transmitting at least one pilot signal ~~claim 6~~. Due to the transmission and evaluation of pilot signals at the receiving end, detection of the transmission characteristics of the transmission medium arranged between the first unit and the second unit can be achieved with little technical and economic expenditure. In particular, the transfer function $H(f)$ of the transmission medium and, in particular, the absolute value of the transfer function $|H(f)|$ ~~claim 5~~ can be determined in a particularly simple manner by evaluating received, frequency-selective pilot signals.

15 The at least one subcarrier of the transmit signal for transmitting the at least one pilot signal is advantageously modulated by a phase modulation method, wherein the pilot signal ~~having~~ is a certain reference amplitude ~~claim 7~~. Due to this advantageous embodiment, the subcarriers of the transmit signal utilized for the transmission of pilot signals are additionally used, at least partially, for transmission of useful information or, respectively, digital data streams, ~~thus~~ Thus, ~~achieving~~ a further improvement in the utilization of the transmission resources of the transmission medium is achieved.

20 In the case of transmit signals having a large number of subcarriers, the transmission medium has virtually identical transmission parameters for adjacent subcarriers. According to a further advantageous embodiment of the method according to the present invention, the amplitude-specific and/or phase-specific transmission characteristics of adjacent subcarriers of the incoming transmit signal are averaged for determining the frequency-selective transmission characteristics of the transmission medium ~~claim 8~~. Due to the advantageous averaging over the transmission characteristics of a number of subcarriers, arranged adjacently in the frequency domain, of the transmit signal which have been determined, the number of estimated values, thus the accuracy of the channel estimation at the transmitting

end, is two-dimensionally increased without the spectral distance to adjacent subcarriers becoming too large.

In the case of fast time variations of the transmission media exhibiting transmission characteristics or, respectively, in the case of time-variant transmission media, time-selective, amplitude-specific and/or time-selective, phase-specific transmission characteristics of the transmission medium are determined; according to a further advantageous embodiment of the method according to the present invention, ~~in which~~ Pursuant to such method, a number of frequency-selective, amplitude-specific and/or frequency-selective, phase-specific transmission characteristics, which are determined over a period of time, are stored in the respective unit and then ~~in each case~~ the average over the stored frequency-selective, amplitude-specific and/or frequency-selective, phase-specific transmission characteristics is formed. Following this, the frequency-specific subcarriers of the transmit signal are adapted to the transmission characteristics of the transmission medium which are averaged over time ~~claim 9~~. Due to the averaging over a number of frequency-selective transmission characteristics of the transmission medium which have been determined successively in time, the first derivation of the time variations of the transmission characteristics of the transmission medium is corrected during the detection of the transmission characteristics, which further improves the quality of the channel estimation at the transmitting end and the channel equalization at the transmitting end.

The frequency-selective transmission characteristics which have been determined are advantageously transmitted by the first unit to the second unit and the frequency-specific subcarriers of the further transmit signal are adapted to the transmitted transmission characteristics of the transmission medium in the second unit ~~claim 10~~. Due to this advantageous variant of the this embodiment, the transmission characteristics of the transmission medium arranged between the first unit and the second unit are only determined in one unit and the result of the determination is transmitted in parameterized form to the second unit as a result of

which the expenditure for implementing the channel equalization at the transmitting end is kept low both in the first unit and in the second unit.

According to a further advantageous embodiment of the present invention, the signal power/noise power ratio S/N is determined for each subcarrier of the transmit signal in the determination of the frequency-selective transmission characteristics and the subcarriers are used for transmitting information (dsu, dsd) in dependence on the signal power/noise power ratio S/N determined in each case ~~claim 14~~. In the case of a signal power/noise power ratio S/N measured below a limit value, the corresponding subcarrier is advantageously not used for transmitting information ~~claim 15~~. Due to the deactivation of the subcarriers having, in each case, an inadequate signal power/noise power ratio S/N and thus not being usable for information transmission, the transmitting power of the remaining subcarriers used for information transmission can be correspondingly increased. Increasing the transmitting power of the subcarriers used for information transmission further reduces their bit error probability.

Additional features and advantages of the present invention are described in, and will be apparent from, the following Detailed Description of the Preferred Embodiments and the Drawings.

DESCRIPTION OF THE DRAWINGS

Further advantageous embodiments of the method according to the invention can be found in the further claims.

In the text which follows, the method according to the invention will be explained in greater detail with reference to two drawings, in which:

Figure 1 shows a centralized transceiver unit implementing an OFDM transmission method; and

Figure 2 shows a decentralized transceiver unit which is connected to a centralized transceiver unit according to ~~figure~~ Figure 1 via the transmission medium "radio channel" and implements an OFDM transmission method.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 1 and Figure 2 in this case show in a block diagram a first and second transceiver unit SEE1,2 which can be, for example, modular components of transmitting and receiving systems implementing wireless communication networks. In the present exemplary embodiment, the first transceiver unit SEE1 shown in Figure 1 is arranged in a base station BS representing the center of a radio cell or of a radio area (not shown) and the second transceiver unit SEE2 shown in Figure 2 is arranged in a decentralized wireless network terminating unit RNT representing a wireless subscriber line unit, Figure 2 only shows a wireless network terminating unit RNT as representative of decentralized network terminating units allocated to the base station BS or, respectively, the radio cell. To each decentralized wireless network terminating unit RNT, at least one decentralized communication terminal (not shown) can be connected which can be constructed, for example, as multimedia communication terminal or as ISDN-oriented telephone terminal. The decentralized wireless network terminating units RNT and the decentralized communication terminals connected to them can be connected to a higher-level communication network connected to the base station BS for example an ISDN-oriented landline network or a broadband-oriented multimedia communication network, (not shown) via the wireless transmission medium "radio channel".

The first transceiver unit SEE1 shown in Figure 1 has a data input ED to which a digital serial data stream dsd to be transmitted from the higher-level communication network to the decentralized wireless network terminating units RNT is conducted. The data input ED is connected to an input EO of an OFDM transmit unit SOB which is arranged in the first transceiver unit SEE1 and in which a method, already explained in the introduction to the description, for forming an OFDM signal sd having n subcarriers is implemented. The OFDM transmit unit SOB exhibits a modulator MOD which modulates the n subcarriers of the OFDM signal sd and which is connected via n outputs AM1...n and n link lines to n frequency-selective inputs EF1...n, associated with the n subcarriers of the OFDM signal sd, of a transformation unit IFFT for performing a discrete inverse fast

Fourier transformation. The transformation unit IFFT is used for generating from the subcarrier-specific modulation symbols or, respectively, transmit symbols SS1...n conducted from a modulator MOD to the frequency-selective inputs EF1...n of the transformation unit IFFT a discrete-time OFDM signal. In the OFDM transmit unit SOB, other units, (not shown), e.g., such as parallel/serial converters, digital/analog converters, filter units, and amplitude limiters, for converting the discrete-time OFDM signal into the analog OFDM signal sd, for example by adhering to spectrum masks defined for wireless communication networks or mobile radio systems and stipulated by ETSI standardization, are arranged. The OFDM transmit unit SOB is connected via an output AO to an input EH of a radio-frequency transmit unit HS which is connected via an output AH and via an antenna output AS of the first transceiver unit SEE1 to a transmit antenna SA arranged in the external area of the base station BS. The analog OFDM transmit signal sd is amplified by a transmit amplifier, not shown, arranged in the radio-frequency transmit unit HS, is mixed into the radio-frequency or RF band and subsequently transmitted via the transmit antenna SA and via the wireless transmission medium "radio channel" to the decentralized network terminating units RNT arranged in the radio cell of the base station BS (also called the downstream direction).

Furthermore, an OFDM receiving unit EOB is arranged in the first transceiver unit SEE1, which is connected via an input EO to an output AH of a radio-frequency receiving unit HE. The radio-frequency receiving unit HE has an input EH which is connected to a receiving antenna EA arranged in the external area of the base station BS, via an antenna input ES of the first transceiver unit SEE1. An OFDM signal su transmitted by a decentralized network terminating unit RNT to the base station BS and received at the receiving antenna EA of the base station BS is down converted to the intermediate-frequency band or, respectively, the baseband by a conversion means, device (not shown), arranged in the radio-frequency receiving unit HE and then forwarded to the input EO of the OFDM receiving unit EOB.

In the OFDM receiving unit EOB, a transformation unit FFT for implementing a discrete fast Fourier transform and having a number of frequency-selective outputs AF1...n is arranged, each frequency-selective output AF1...n being associated with one subcarrier of the received OFDM signal. After previous
5 discretization and digitization with the aid of an analog/digital converter, (not shown), the OFDM signal su received and down converted into the intermediate-frequency band or baseband, respectively, is transformed into the frequency domain with the aid of the fast Fourier transform implemented by the transformation unit FFT; i.e., the modulation symbols or receive symbols es1...n of the respective subcarriers contained
10 in the OFDM signal are determined and then forwarded to the corresponding frequency-selective outputs AF1...n of the transformation unit FFT. The outputs AF1...n of the transformation unit FFT are connected to n inputs EM1...n of a demodulator DMOD via n link lines. From the receive symbols es1...n forwarded to the demodulator DMOD from the transformation unit FFT, the corresponding receive
15 code words transmitted via the respective subcarriers are determined with the aid of a demodulation method implemented in the demodulator DMOD. The receive code words which have been determined are then converted with the aid of a parallel/serial converter, (not shown), associated with the OFDM receiving unit EOB, into a serial digital data stream deu which is forwarded, for example, to the higher-level
20 communication network via a data output AD of the first transceiver unit SEE1.

The second transceiver unit SEE2, arranged in the decentralized wireless network terminating unit RNT according to ~~figure~~ Figure 2, has an OFDM receiving unit EON which is connected via an input EO to an output AH of a radio-frequency receiving unit HE arranged in the second transceiver unit SEE2. The radio-frequency receiving unit HE is connected via an input EH to a receiving antenna EA arranged in the external area of the network terminating unit RNT. The OFDM signal sd transmitted by the base station BS to the network terminating unit RNT and received at the receiving antenna EA is down converted into the intermediate-frequency band or, respectively, the baseband by a conversion ~~means, device~~ (not shown), arranged in the radio-frequency receiving unit HE, and

then forwarded to the input EO of the OFDM receiving unit EON. In the OFDM receiving unit EON, a transformation unit FFT for implementing a discrete fast Fourier transform and exhibiting a number of frequency-selective outputs AF1...n is arranged, each frequency-selective output AF1...n being associated with one

5 subcarrier of the received OFDM signal sd. Using the fast Fourier transform implemented by the transformation unit FFT, the OFDM signal sd received and down converted into the intermediate-frequency band or baseband, respectively, is transformed into the frequency domain after previous discretization and digitization with the aid of an analog/digital converter; ~~(not shown);~~ i.e., the modulation

10 symbols or receive symbols es1...n of the respective subcarriers contained in the received OFDM signal sd are determined and then forwarded to the corresponding frequency-selective outputs AF1...n of the transformation unit FFT. The n outputs AF1...n of the transformation unit FFT are connected via n link lines to n inputs EK1...n of a channel estimation unit KS which is connected to corresponding

15 frequency-selective inputs EM1...n of a demodulator DMOD arranged in the OFDM receiving unit EON via n outputs AK1...n and n link lines. The frequency-selective receive symbols es1...n transmitted by the transformation unit FFT to the channel estimation unit KS are forwarded to the inputs EM1...n of the demodulator DMOD. In the channel estimation unit KS, a first evaluating means device UF ~~are~~

20 ~~is arranged by means of~~ via which the frequency-selective amplitude-specific transmission channel characteristics of the transmission medium "radio channel" are determined from the receive symbols es1...n conducted to the channel estimation unit KS; i.e., the frequency-selective amplitude distortions (also called amplitude response or absolute value of the transfer function of the radio channel

25 $|H(f)|$) caused by the transmission medium "radio channel" are determined for each subcarrier. Furthermore, the S/N ratio is determined for each subcarrier from the incoming receive symbols es1...n ~~by means of~~ via a further evaluating means device SN arranged in the channel estimation unit KS. From the frequency-selective amplitude response $|H(f)|$ determined and the frequency-selective S/N ratio

30 determined, an information signal is transmitting the results of the determination is

generated by a signal generating means, device (not shown), arranged in the channel estimation unit KS, which information signal is forwarded to a control output SA of the OFDM receiving unit EON via an output ASK of the channel estimation unit KS.

5 The frequency-selective receive symbols $es_1 \dots s_n$ forwarded to the demodulator DMOD from the channel estimation unit KS are converted into the receive code words transmitted via the respective subcarriers by a demodulation method implemented in the demodulator DMOD. From the receive code words determined, a serial/digital data stream ded is then formed with the aid of a
10 parallel/serial converter, (not shown), which is associated with the OFDM receiving unit EON, which data stream is conducted to a data output AS of the second transceiver unit SEE2 via an output AO of the OFDM receiving unit EON and is then transmitted, for example, to a decentralized destination communication terminal, not shown, which is connected to the decentralized network terminating
15 unit RNT.

 The control output SA of the second transceiver unit SEE2 arranged in the decentralized network terminating unit RNT is connected via a link line VL to a control input SE of an OFDM transmit unit SON arranged in the second transceiver unit SEE2, in which transmit unit a method for forming an OFDM signal su to be
20 transmitted in the upstream direction and having n subcarriers is implemented. The OFDM transmit unit SON is connected via an input EO to a data input ES of the second transceiver unit SEE2 to which, for example, a digital serial data stream dsu to be transmitted from a decentralized communication terminal via the wireless transmission medium "radio channel" to the higher-level communication network is
25 conducted. The digital serial data stream dsu is divided into n parallel sub-data streams, or converted in parallel form, respectively, by a serial/parallel converter, (not shown), which is associated with the OFDM transmit unit SON, each of the n sub-data streams being allocated to one of the n subcarriers of the OFDM signal. The n parallel sub-data streams are conducted to a modulator MOD arranged in the
30 OFDM transmit unit SON and modulating the n subcarriers of the OFDM signal os ,

the incoming n sub-data streams being converted into n frequency-selective modulation symbols or transmit symbols $ss1...n$ associated with the n subcarriers of the OFDM signal by a modulation method implemented in the modulator MOD.

The n frequency-selective transmit symbols $ss1...n$ formed are forwarded to n

- 5 outputs AK1...n of the modulator MOD which is connected to n frequency-selective inputs EE1...n of a channel equalizer unit EZ, which are associated with the n subcarriers of the OFDM signal su . The channel equalizer unit EZ has a control input ESS which is connected to the control input SE of the OFDM transmit unit SON and is thus connected to the output ASK of the channel estimation unit KS
- 10 arranged in the OFDM receiving unit EON via the link line VL.

The channel equalizer unit EZ has means capabilities for adapting the transmit symbols $ss1...n$ formed by the modulator MOD and forwarded to the channel equalizer unit EZ to the frequency-selective amplitude-specific transmission channel characteristics of the transmission medium "radio channel" determined in the OFDM receiving unit EON (also called "equalization"

- 15 of the amplitude response" or "amplitude equalization")₂; i.e., the amplitudes of the frequency-selective transmit symbols $ss1...n$ are corrected in dependence on the information signal ~~is~~ transmitted to the control input ESS. For example, the frequency-selective transmit symbols $ss1...n$ are multiplied by the inverse of the absolute value of the transfer function of the radio channel determined₂ in this case $1/|H(f)|$. The n corrected frequency-selective transmit symbols $ss'1...n$ are forward to n outputs AZ1...n of the channel equalizer unit EZ which are connected to corresponding n frequency-selective inputs EF1...n, allocated to the n subcarriers of the OFDM signal, of a transformation unit IFFT for performing a discrete inverse
- 20 fast Fourier transformation. Using the transformation unit IFFT, a discrete-time OFDM signal is calculated from the subcarrier-specific and corrected transmit symbols $ss'1...n$ forwarded from the channel equalizer unit EZ to the frequency-selective inputs EF1...n of the transformation unit IFFT. In the OFDM transmit unit SON, further units, (not shown), e.g. such as parallel/serial converters,
- 25 digital/analog converters, filter units, and amplitude limiters₂ for converting the
- 30

discrete-time OFDM signal into an analog OFDM transmit signal s_u , for example by adhering to the aforementioned ETSI spectrum masks, are arranged. The OFDM transmit unit SON is connected via an output AO to an input EH of a radio-frequency transmit unit HS which is connected to a transmit antenna SA arranged in the external area of the decentralized network terminating unit RNT via an output AH and via an antenna output AS of the second transceiver unit SEE2. The analog OFDM transmit signal s_u is amplified by a transmit amplifier, not shown, which is arranged in the radio-frequency transmit unit HF, is converted into the radio-frequency band or RF band and then transmitted to the base station BS via the transmit antenna SA and via the wireless transmission medium "radio channel" in the upstream direction.

It should be noted that the exemplary embodiment described only represents a functional description of the method according to the present invention; i.e., the embodiment of the first and second transceiver unit SEE1,2 described in the exemplary embodiment can also be implemented by alternative variants of the embodiment. For example, the radio-frequency transmitting unit and receiving unit HS, HE arranged in each case in a transceiver unit SEE1,2 can be replaced by a radio-frequency converter unit, (not shown), where the respective transmitting and receiving paths are separated ~~by means of~~ via a switch, not shown.

In the text which follows, the method according to the present invention for maximum utilization of the transmission resources provided by the wireless transmission medium "radio channel" is explained in greater detail.

The radio-frequency transmitting and receiving units HS, HE arranged in the first and second transceiver unit SEE1,2 are designed in such a manner that OFDM signals s_d , s_u transmitted in the downstream and upstream direction are transmitted in the TDD (time division duplex) transmission method. In the TDD transmission method, the information to be transmitted between the base station BS and the wireless decentralized network terminating units RNT are alternately transmitted with the aid of signal bursts of a particular extent in time which are sent out in the same frequency range. In this method, the transceiver units SEE1,2

arranged in the network terminating units RNT and in the base station BS are alternately switched to transmit and receive mode. When the TDD transmission method is used, the wireless transmission medium "radio channel" exhibits reciprocal characteristics. ~~i.e.~~ That is, the OFDM signal sd sent out in bursts in the downstream direction by the base station BS and received by a decentralized network terminating unit RNT, it is possible to determine or, respectively, estimate the frequency-selective amplitude-specific and/or phase-specific transmission channel characteristics of the transmission medium "radio channel" for the OFDM signal su to be transmitted in the upstream direction by the decentralized network terminating unit RNT.

According to a first variant of the embodiment of the method according to the present invention, a differential phase modulation method (differential phase shift keying, for example a 64 DPSK), is implemented in the modulator MOD arranged in the OFDM transmit unit SOB of the first transceiver unit SEE1. When a differential modulation method is used, no carrier recovery of the received OFDM signal sd and no precise recovery of the bit clock is required in the subsequent demodulation in the corresponding OFDM receiving unit EON; or, respectively, the demodulator DMOD arranged therein. To provide for a determination of the frequency-selective transmission characteristics of the transmission medium "radio channel", also called channel estimation in the text which follows, at the receiving end, the modulator MOD arranged in the base station BS is designed in such a manner that a particular number of the transmit symbols ss1...n present at the n outputs AM1...n of the modulator MOD are designed as pilot symbols with defined reference amplitudes; i.e., some of the subcarriers of the OFDM signal sd to be transmitted in the downstream direction are used for transmitting in each case a pilot tone or pilot signal having a defined reference amplitude. For example, 10% of the subcarriers of the OFDM signal sd, which can be used for information transmission, are used for transmitting pilot tones.

From the OFDM signal received at the receiving antenna EA of the network terminating unit RNT, the transmitted receive symbols es1...n of the respective

subcarriers of the received OFDM signal s_d are determined by the transformation unit FFT arranged in the OFDM receiving unit EON and forwarded to the channel estimation unit KS.

From the receive symbols $es_{1...n}$ present at the inputs $EK_{1...n}$ and designed as pilot symbols, the frequency-selective, amplitude-specific transmission characteristics or frequency-selective attenuation characteristics of the transmission medium "radio channel" FK arranged between the base station BS and the decentralized wireless network terminating unit RNT are determined. ~~That is,~~ That is, the amplitude response or absolute value of the transmission function $|H(f)|$ of the transmission medium "radio channel" FK is determined by the first evaluating ~~means~~ device HF arranged in the channel estimation unit KS. With the aid of the information signal is, the transmission characteristics of the transmission medium "radio channel" FK which have been determined are then transmitted to the control input SE of the OFDM transmitting unit SON arranged in the decentralized network terminating unit RNT via the link line VL. Furthermore, the receive symbols $es_{1...n}$ forwarded from the channel estimation unit KS to the n inputs $EM_{1...n}$ of the demodulator DMOD are converted in the OFDM receiving unit EON, with the aid of the differential or, respectively, incoherent demodulation method implemented in the demodulator DMOD, into the receive code words transmitted via the respective subcarriers of the OFDM signal s_d , from which code words the serial digital data stream ded conducted to the output AS of the second transceiver unit SEE2 is formed.

According to the present invention, the OFDM signal to be transmitted to the base station BS in the upstream direction is generated ~~in dependence~~ depending on the transmission channel characteristics of the transmission medium "radio channel" determined by the OFDM receiving unit EON and forwarded to the OFDM transmitting unit SON. For this purpose, the digital serial data stream dsu received at the input EO of the OFDM transmitting unit SON arranged in the second transceiver unit SEE2 and to be transmitted to the base station BS is converted into parallel form and converted into the transmit symbols $ss_{1...n}$

associated with the n subcarriers of the OFDM signal, with the aid of the modulator MOD. The transmit symbols $ss1...n$ formed are forwarded to the n inputs $EE1...n$ of the channel equalizer unit EZ and adapted to the frequency-selective amplitude-specific transmission channel characteristics of the transmission medium "radio channel" FK, which have been determined, by the correction ~~means device~~ $1/HF$ arranged in the equalizer unit (also called amplitude equalization at the transmitting end). The amplitude equalization at the transmitting end implemented by the correction ~~means device~~ $1/HF$ takes place in such a manner that the transmit symbols $ss1...n$ of the individual subcarriers of the OFDM signal su are multiplied by a factor representing the absolute value of the inverse of the transfer function $H_n(f)$ determined, in this case, $1/|H_n(f)|$ for $0 \leq n \leq N-1$, wherein n ~~representing~~ represents the length of the Fourier transform implemented in the transformation unit IFFT and $H_n(f)$ ~~representing~~ represents the transfer function of the n th subcarrier of the OFDM signal.

The frequency-selective amplitude equalization according to the present invention, at the transmitting end, which has been described, has the effect that all subcarriers of the OFDM signal su transmitted to the base station BS from the decentralized network terminating unit RNT in the upstream direction have the same receive levels or signal amplitude values when they arrive at the receiving antenna EA of the base station BS. Since all subcarriers of the OFDM signal su received in the base station BS have the same receive level, the signal power/noise power ratio S/N is identical for all subcarriers. Thus, all subcarriers can be modulated with the same number of modulation levels at the transmitting end; i.e., with the aid of the OFDM transmitting unit SON arranged in the decentralized network terminating unit RNT or, respectively, with the aid of the modulator MOD arranged there, ~~thus achieving~~ This achieves maximum utilization of the transmission resources of the individual subcarriers of the OFDM signal su . For example, if the decentralized network terminating units RNT are arranged close to the base station BS, the individual subcarriers of the OFDM signal su to be transmitted to the base station BS in the upstream direction can be modulated with

the aid of the 64-QAM (quadrature amplitude modulation). As the distance between the decentralized network terminating unit RNT and the base station BS increases, i.e. with increasing attenuation characteristics of the transmission medium "radio channel" FK, the number of modulation levels is reduced. Due to the identical S/N ratio of the subcarrier of the OFDM signal s_u received in the base station BS, no subcarrier-individual number of modulation levels is required for controlling the demodulation of the received OFDM signal so that the control effort for modulating and demodulating the OFDM signal s_u is advantageously minimum. By avoiding the requirement of subcarrier-individual number of modulation levels, no additional overhead is generated for transmitting additional control information controlling the subcarrier-individual modulation and demodulation, thus preventing the transmission capacity of the transmission medium "radio channel" from being reduced.

As an alternative, the transmission power of the OFDM signal s_u to be sent out can be correspondingly reduced instead of increasing the number of modulation levels of the OFDM signal s_u to be sent in the upstream direction. The transmission power can be lowered, for example, in the radio-frequency transmit unit HS of the decentralized network terminating unit RNT. Lowering the transmission power minimizes the mutual interference of the subcarriers of OFDM signals s_d , s_u sent within a radio cell, also called intercell interference (ICI) and, as a result, the transmission capacity of the total system arranged within a radio cell is increased.

According to a further advantageous variant of the embodiment of the method according to the present invention, the channel estimation unit KS of the OFDM receiving unit EON arranged in the decentralized network terminating unit RNT has a further evaluating ~~means~~ device SN for detecting the subcarrier-individual S/N ratios of the respective subcarriers of the received OFDM signal s_d . The subcarrier-individual S/N ratios detected in each case with the aid of the further evaluating ~~means~~ device S/N are additionally transmitted, in addition to the detected amplitude-specific transmission characteristics $H(f)$ of the transmission medium FK with the aid of the information signal is via the link line VL to the

OFDM transmitting unit SON arranged in the decentralized network terminating unit RNT or, respectively, to the channel equalizer unit EZ arranged there.

- In the channel equalizer unit EZ a further correction ~~means device~~, (not shown here), ~~are~~ ~~is~~ arranged ~~by means of~~ via which the subcarriers having
- 5 unfavorable S/N ratios or the subcarriers having an S/N ratio which is measured below a limit value, are deactivated in dependence on the S/N ratios transmitted to the control input ESS, and ~~thus~~ ~~are thus~~ not used for information transmission. For example, in the case of decentralized network terminating units RNT which are at a large distance from the base station BS, only every second or fourth subcarrier of
- 10 the OFDM signal s_u to be sent to the base station BS is used for information transmission, the transmission power of the subcarriers used for information transmission being correspondingly increased. Increasing the transmission power of the subcarriers used for information transmission further reduces the bit error probability. Deactivated subcarriers of the received OFDM signal can be detected
- 15 by simple amplitude calculation in the OFDM receiving unit EON, EOB.

- Since the determination of the frequency-selective amplitude-specific transmission characteristics of the transmission medium "radio channel" FK, implemented in the decentralized network terminating unit RNT at the transmitting end, only requires the evaluation of the amplitude value of the pilot symbols or
- 20 pilot tones transmitted from the base station BS to the decentralized network terminating unit RNT by the channel estimation unit KS arranged in the decentralized network terminating unit RNT, the phase information of the pilot symbols or pilot tones of the OFDM signals s_d , sent from the base station BS to the decentralized network terminating unit RNT, can be additionally used
- 25 for transmitting the digital information s_{sd} . The subcarriers of the OFDM signal s_d which transmits pilot symbols or pilot tones can be modulated, for example, with the aid of an absolute or differential phase modulation method with defined reference amplitude as a result of which an advantageous utilization of the transmission capacity of the transmission medium "radio channel" is achieved.

The OFDM transmission units SOB, SON arranged in the base station BS or decentralized network terminating unit RNT or, respectively, the modulators MOD arranged there, are designed in such a manner that the subcarriers of the OFDM signals sd, su which are not used for the transmission of pilot tones are modulated with a coherent or absolute modulation method, for example an m-level QAM, since m-level QAM modulation methods can also be used in transmission media with unfavorable S/N ratios.

When coherent m-level modulation methods are used, additional ~~means~~, methods (not shown), for the channel estimation or channel equalization at the receiving end, required according to the prior art, especially for phase equalization, ~~i.e. correction of the phase angles~~, of the subcarriers received in each case of the received OFDM signal sd, su are required in the corresponding OFDM receiving units EON, EOB arranged in the base station BS and, respectively, the decentralized network terminating unit RNT. To provide for correction of the phase angles of the incoming subcarriers in the OFDM receiving unit EON, EOB, the first subcarrier of the OFDM signal sd, su is transmitted with a defined phase, e.g. $\varphi = 0$ degrees, by the OFDM transmitting unit SOB, SON. The phase of the first subcarrier is rotated by, for example, $\Delta\varphi$ by the transmission medium "radio channel" FK. The second subcarrier arranged closely adjacently to the first subcarrier is also rotated by $\Delta\varphi$ in this process. To restore the original phase angles of the transmitted OFDM signal sd, su, the second subcarrier must be multiplied by the complex factor $e^{-j\Delta\varphi}$ by the correction ~~means~~ device arranged in the OFDM receiving unit EON, EOB. The phase shift $\Delta\varphi$ of the first subcarrier caused by the transmission medium "radio channel" FK can be detected, and the phase angle of the adjacent second subcarrier of the received OFDM signal can be correspondingly corrected with the aid of the correction ~~means~~ device due to the pilot tone with defined transmitting phase transmitted via the first subcarrier. After the correction of the phase angle or phase equalization at the receiving end, the information transmitted via the second subcarrier is decided with the aid of the demodulator. The phase shift of the second subcarrier is determined in dependence on the result

of the decision. The phase angle of the third subcarrier is then corrected in the manner described ~~by means of~~ via the phase shift of the second subcarrier determined, etc.

According to a further advantageous embodiment of the method according to the present invention, the OFDM receiving unit EOB arranged in the base station BS also has a channel estimation unit KS, not shown, ~~by means of~~ via which the receive symbols $es_1 \dots n$ transmitted with the aid of the received OFDM signal su are evaluated and, from this, the frequency-selective, amplitude-specific radio channel characteristics of the transmission medium "radio channel" FK are evaluated in the manner described and are transmitted via a link line₇ (not shown), to a further channel equalizer unit₈ (not shown), which is arranged in the OFDM transmitting unit SOB of the base station BS. Due to this advantageous embodiment, the OFDM signals sd to be transmitted to the decentralized network terminating units RNT from the base station BS in the downstream direction, and the subcarriers contained therein, can also be adapted to the transmission characteristics of the transmission medium "radio channel". The equalization of the amplitude response at the transmitting end achieved in this manner, both in the downstream direction and in the upstream direction, further improves the utilization of the transmission capacity of the transmission medium "radio channel" FK. However, this presupposes that some of the subcarriers of the OFDM signal su to be transmitted from the decentralized network terminating unit RNT to the base station BS are used for transmitting pilot symbols or pilot tones as already described. The modulator MOD arranged in the OFDM transmitting unit SON of the decentralized network terminating unit RNT is advantageously designed in such a manner that the subcarriers of the OFDM signal su which are used for the transmission of pilot symbols are modulated with the aid of a phase modulation method₄ for example a QPSK modulation method₄ with defined reference transmit amplitude. By using phase modulation, the pilot symbols or pilot tones transmitted in the upstream direction are also at least partially ~~also~~ used for transmitting the digital data stream dsu .

To increase the accuracy of channel estimation in the decentralized network terminating unit RNT and possibly in the base station BS, the subcarriers of an OFDM signal s_d, s_u which, in each case, transmit pilot tones or pilot symbols can be transmitted with increased power.

5 According to a further variant of the embodiment, the channel estimation at the transmitting end is only performed by the channel estimation unit KS arranged in the decentralized network terminating unit RNT and then the frequency-selective, amplitude-specific transmission characteristics of the transmission medium "radio channel" which have been determined are transmitted in
10 parameterized form to the base station BS or, respectively, the OFDM transmitting unit SOB arranged there. The equalization of the amplitude response of the subcarriers of the OFDM signal s_d to be transmitted in the downstream direction from the base station BS is carried out by a channel equalizer unit, (not shown), which is arranged in the OFDM transmitting unit SOB of the base station BS, with
15 the aid of the parameterized transmission characteristics transmitted.

Advantageously, only the changes of the transmission characteristics with time are transmitted to the base station BS and thus the overhead during the transmission of the transmission characteristics is minimized.

In the case of OFDM signals s_d, s_u , having a large number of subcarriers,
20 the transmission medium "radio channel" FK has virtually identical transmission characteristics for adjacent subcarriers. Advantageously, in addition to the directly adjacent subcarriers, the adjoining subcarriers in the frequency range are also taken into consideration for the determination of the frequency-selective transmission characteristics of the transmission medium or the channel estimation at the
25 transmitting end performed in an OFDM receiving unit EON, EOB_z; i.e., an average is formed over determined transmission characteristics of a number of subcarriers arranged adjacently in the frequency range. The averaging has the advantage that the number of estimated values, and thus the accuracy of the channel estimation at the transmitting end is two-dimensionally increased without the spectral distance
30 from adjacent subcarriers becoming too great.

According to a further advantageous embodiment of the method according to the present invention, in the case of radio channels exhibiting a fast change with time (also called time-variant transmission channels or radio channels), the OFDM signals following in time, i.e., those received at the receiving antenna EA within a certain period of time or, respectively, the receive symbols es1...n contained therein, are also taken into consideration in the channel estimation implemented in the channel estimation unit KS. Implementation of this variant of the embodiment requires the storing of the receive symbols es1...n received successively in time or storing of the frequency-selective transmission characteristics determined in each case, in a memory, not shown, which is arranged in the first or second transceiver unit SEE1, 2. Averaging over a number of receive symbols es1...n in each case belonging to a subcarrier and received successively in time, within the channel estimation at the transmitting end performed in the channel estimation unit KS corrects the first generation of the changes with time of the transmission characteristics of the transmission medium "radio channel" FK during the detection of the transmission characteristics. Advantageously, the subcarriers arranged symmetrically about the current subcarrier in the frequency domain or, respectively, the receive symbols es1...n transmitted via this subcarrier, are taken into consideration during the averaging. As an alternative, the averaging can also be done in the channel equalizer unit EZ of the OFDM transmitting unit SON.

The determination of the frequency-selective, amplitude-specific transmission characteristics of the transmission medium "radio channel" FK, performed with the aid of the evaluating ~~means~~ device H(f) in the channel estimation unit KS, also called calculation of the estimated amplitude values, is relatively complex. The amplitude values of all received receive symbols es1...n of an OFDM signal sd are calculated following the calculation rule

$$\sqrt{I^2 + Q^2} = \text{Amplitude}$$

where I is the imaginary part and Q is the real part of a received complex receive signal $es1...n$. The respective frequency-selective estimated amplitude values can be calculated serially, at least partially, so that the technical complexity or hardware complexity for calculating the estimated amplitude values is kept low.

5 According to an advantageous embodiment, the estimated amplitude values are calculated from the frequency-selective receive symbols $es1...n$ received in each case, with the aid of values stored in a table called look-up table. For this purpose, the receive values of the imaginary part I and of the real part Q of a receive symbol $es1...n$, which are in each case possible, are combined to form a table address and
10 are stored in the look-up table. Furthermore, to each stored table address, the associated correction factor, $1/|H_n(f)|$ in this case, is allocated and stored in the corresponding table entry. The correction factors allocated to the respective table addresses represent the values by which the respective transmit symbols $ss1...n$ of the OFDM signal sd, su to be sent out are multiplied. The extent or, respectively,
15 number of entries of the look-up table is advantageously kept small if it is restricted to one quadrant of the complex plane, transmit symbols $ss1...n$ having negative imaginary and real part values being inverted before the amplitude equalization at the transmitting end.

 According to a further advantageous embodiment, the multiplication of the
20 subcarriers or, respectively, of the transmit symbols $ss1...n$ to be transmitted via the subcarriers, by the correction factor determined, $1/|H_n(f)|$ in this case, is implemented by an addition or, respectively, subtraction with values also stored in a look-up table. This advantageous embodiment further reduces the computing effort for correcting the transmit symbols during the amplitude equalization.

25 Although the present invention has been described with reference to specific embodiments, those of skill in the art will recognize that changes may be made thereto without departing from the spirit and scope of the invention as set forth in the hereafter appended claims.

Abstract**ABSTRACT OF THE DISCLOSURE**

Method and communication arrangement for transmitting information with the aid of a multicarrier method.

5

To transmit information with the aid of a transmit signal (~~su~~) exhibiting a number of frequency-specific subcarriers from a first unit (~~RNT~~) to a second unit (~~BS~~) via a transmission medium (~~FK~~), the frequency-selective transmission characteristics of the transmission medium (~~FK~~) are determined in the first unit (~~RNT~~) and then the subcarriers of the transmit signal (~~su~~) are adapted to the transmission characteristics determined. All subcarriers of the transmit signal (~~su~~) can be advantageously modulated with the same number of modulation levels as a result of which maximum utilization of the transmission resources of the transmission medium (~~FK~~) is achieved.

10

15
Figure 2

09/868237-001

2/PRTS

09/868237
JC18 Rec'd PCT/PTO 1 5 JUN 2001

GR 98 P 5925

- 1 -

Description

Method and communication arrangement for transmitting information with the aid of a multicarrier method.

5

In wireless communication networks based on radio channels, especially in point-to-multipoint radio feeder networks - also called "radio in the local loop" or, respectively, "RLL" - a number of network
10 terminating units are in each case connected to a base station - also called "radio base station" or, respectively "RBS" - via one or more radio channels. In telcom report No. 18 (1995), vol. 1 "Drahtlos zum Freizeichen" [Wireless to the ringing tone] page 36,
15 37, for example, a wireless feeder network for the wireless speech and data communication is described. The communication system described represents an RLL subscriber line in combination with a modern broadband infrastructure - e.g. "fiber to the curb" which can be
20 implemented within a short time and without great expenditure instead of running wire-connected local loops. The network terminating units RNT allocated to the individual subscribers are connected to a higher-level communication network, for example to the ISDN-
25 oriented landline network, via the "radio channel" transmission medium and the base station RBS.

Due to the increasing spread of multimedia applications, high-bit-rate data streams must be
30 transmitted rapidly and reliably via communication networks, especially via wireless communication networks or, respectively, via mobile radio systems, and high demands are made on the radio transmission systems which are based on a transmission medium "radio
35 channel" which is susceptible to interference and difficult to assess with regard to the quality of transmission. A transmission method for transmitting broadband data streams - e.g. video data streams - is

09/868237, 09/868237

represented by, for example, the OFDM (orthogonal frequency division multiplexing) transmission method based on a so-called multicarrier method. In the OFDM transmission technology,

09000000.000000

the information to be transferred or, respectively, the data stream to be transferred is divided or, respectively, converted to parallel form, to a number of sub-channels or subcarriers within the radio channel, the information to be transferred in each case being transmitted at a relatively low data rate but in parallel in relatively superimposed form. The OFDM transmission technology is used, for example, in digital terrestrial radio - also called digital audio broadcasting DAB - and for digital terrestrial television - also called digital terrestrial video broadcasting DTVB.

The OFDM transmission method is described in greater detail in the printed document "Mitteilungen der TU-Braunschweig, Mobilfunktechnik für Multimedia-Anwendungen" (Information as the Braunschweig technical university, mobile radio technology for multimedia applications), Professor H. Rohling, volume XXXI, issue 1-1996, in figure 6, page 46. In this method, a serial/parallel conversion is performed for the modulation of the, for example, n subcarriers on the basis of a serial data stream in the transmitter, a binary code word with word length k - the word length k is dependent on the modulation method used - being formed in each case for the i th OFDM block in time with block length T' and the j th subcarrier. From the code words formed, the corresponding complex modulation symbols - also called transmit symbols in the text which follows - are formed with the aid of a transmitter-specific modulation method, one transmit symbol being allocated to each of the k subcarriers at any time i . The spacing of the individual subcarriers is defined by $\Delta f = 1/T'$ which guarantees that the individual subcarrier signals are orthogonal within the useful interval $[0, T']$. By multiplying the oscillations of the individual subcarriers by the corresponding modulation symbols or transmit symbols and

subsequently adding the modulation products formed, the corresponding discrete-time transmit signal is generated for the i th OFDM block in time. This transmit signal is calculated in sampled, i.e. discrete-time form by an inverse discrete Fourier transform - IDFT - directly from the modulation symbols or transmit symbols of the individual subcarriers

considered. To minimize intersymbol interferences, each OFDM block is preceded by a guard interval T_G in the time domain which causes an extension of the discrete-time OFDM signal in the interval $[-T_G, 0]$ - compare

5 "Mitteilungen der TU-Braunschweig, Mobilfunktechnik für Multimedia-Anwendungen", figure 7. The inserted guard interval T_G advantageously corresponds to the maximum delay difference occurring between the individual propagation paths occurring during the radio

10 transmission. By removing the added guard interval T_G at the receiver end, a disturbance of the i th OFDM block by, for example, the adjacent OFDM signal in time at time $i-1$ is avoided, so that the transmit signal is received in interval $[0, T']$ over all indirect paths

15 and the orthogonality between the subcarriers is retained to its full extent in the receiver. In the case of a large number of subcarriers - for example $n = 256$ subcarriers - and correspondingly long symbol periods $T = T' + T_G$, the period T_G is small compared

20 with T so that the insertion of the guard interval effectively does not significantly impair the bandwidth and only a small overhead is produced. After the transmit signal received at the input of the receiver is sampled in the baseband - by an A/D converter - and

25 after the useful interval has been extracted - i.e. after the guard interval T_G has been eliminated - the received transmit signal is transformed into the frequency domain with the aid of a discrete Fourier transform - DFT -, i.e. the received modulation symbols

30 or, respectively, the received receive symbols are determined. From the receive symbols determined, the corresponding receive code words are generated by means of a suitable demodulation method, and from these, the received serial data stream is formed by

35 parallel/serial conversion. Avoiding intersymbol interference in OFDM transmission methods considerably reduces the computing effort in the respective receiver

streams with a transmission rate of 34 Mbit/s per radio channel.

To transmit the serial data stream to be transmitted with the aid of the OFDM transmission method, absolute or, respectively, differential modulation methods and corresponding coherent or, respectively, incoherent, demodulation methods are used. Although the orthogonality of the subcarriers is retained in its full extent by using the OFDM transmission method when transmitting the transmit signal formed via the "radio channel" transmission medium, both the phase and the amplitude of the transmitted discrete-frequency and frequency-selective transmit signals are changed by the transmission characteristics of the radio channel. The influence of the radio channel on amplitude and phase takes place subcarrier-specifically on the individual subcarriers which in each case have a very narrow bandwidth; in addition, noise signals are additively superimposed on the transmitted useful signal. When coherent demodulation methods are used, a channel estimation is required which depends on considerable technical and economic expenditure for its implementation depending on the quality requirements and also reduces the performance of the transmission system. Advantageously, differential modulation methods and corresponding incoherent demodulation methods are used in which any elaborate radio channel estimation can be dispensed with. In the case of differential modulation methods, the information to be transmitted is not transmitted directly by selection of the modulation symbols or the discrete-frequency transmit symbols but by changing the discrete-frequency transmit symbols, which are adjacent in time, on the same subcarrier. Examples of differential modulation methods are the 64-level 64-DPSK (differential phase shift keying) and the 64-DAPSK (differential amplitude and phase shift keying) methods. In the 64-DAPSK, both the

amplitude and simultaneously the phase are differentially modulated.

105130* 222999Z

- 5 -

0985877061501

In known methods for improving the transmission quality
35 in multicarrier systems as are known, for example, from
the document "Comparison between adaptive OFDM and
single carrier modulation with frequency domain
equalization", A. Czulwik, IEEE Vehicular Technology

Conference, USA, New York, vol. Conf. 47, 1997, pp. 865-869, XP000736731, ISBN: 0-77803-3660-7, the transfer function of the channel is estimated by means of information already transmitted. It is assumed here that the characteristics of the radio channel change only slowly in time. The estimated transfer function is transmitted back to the transmitter from the receiving station via signaling stations.

10 In a multicarrier method according to US 5 673 290,
transmission parameters of a communication line are
measured. The modulation method of each carrier is then
adapted to the measured parameters.

15 The invention is based on the object of achieving maximum utilization of the available transmission resources of the transmission medium during the transmission of information via a transmission medium having frequency-selective transmission

20 characteristics. In particular, it is intended to achieve maximum utilization of the transmission resources of all multipath components or subcarriers when using a multicarrier method. The object is achieved

on the basis of a method and a communication arrangement according to the features of the preamble of claims 1 and 20 by their characterizing features.

- 5 In the method according to the invention for transmitting information via a transmission medium having certain transmission characteristics with the aid of a multicarrier method, the information to be transmitted is transmitted by a transmit signal having
- 10 a number of frequency-specific subcarriers, to a second unit via the transmission medium. The essential aspect of the method according to the invention consists in that frequency-selective transmission characteristics of the transmission medium are determined in the first
- 15 unit and then the frequency-specific subcarriers of the transmit signal are adapted to the frequency-selective transmission characteristics of the transmission medium which have been determined.
- 20 The essential advantage of the method according to the invention consists in that due to the channel equalization at the transmitting end and, respectively, adaptation of the frequency-specific subcarriers of the transmit signal to be sent out at the transmitting end
- 25 to the frequency-selective transmission characteristics of the transmission medium which have been determined, all subcarriers of the transmit signal transmitted via the transmission medium have the same receive levels or, respectively, signal amplitude values, and thus the
- 30 same signal power/noise power ratios S/N at the input of the second unit. In consequence, all subcarriers of the transmit signal can be modulated with the same number of modulation levels at the transmitting end so that maximum utilization of the transmission resources
- 35 of the individual subcarriers of the transmit signal, and thus maximum utilization of the transmission resources of the transmission medium is achieved. Due to the fact that the subcarriers of the transmit signal

09060027 061504

are modulated with the same number of modulation levels, the expenditure for controlling the modulation and demodulation and especially the overhead in transmitting the modulation and demodulation control
5 information - for example

090000237 051501

via a separate control channel of the transmission medium - is minimized. Advantageously, the frequency-selective channel equalization according to the invention at the transmitting end prevents the increase
5 in level of the noise signal duly caused in the case of channel equalization at the receiving end and associated with an increase in bit error probability.

According to an advantageous embodiment of the method according to the invention, the frequency-selective transmission characteristics of the transmission medium are determined in the second unit and frequency-specific subcarriers of another transmit signal formed with the aid of a multicarrier method and transmitted from the second unit to the first unit are adapted to the frequency-selective transmission characteristics of the transmission medium which have been determined - claim 2. By determining the frequency-selective transmission characteristics both in the first unit and in the second unit, the channel equalization of the transmit signal at the transmitting end can be advantageously implemented both in the downstream direction and in the upstream direction, as a result of which the utilization of the available transmission resources of the transmission medium arranged between the first unit and the second unit is further improved.

The frequency-selective transmission characteristics are advantageously determined with the aid of the transmit signal transmitted to the first unit and, respectively, second unit via the transmission medium, in which arrangement at least one subcarrier of the transmit signal is used for transmitting at least one pilot signal - claim 6. Due to the transmission and evaluation of pilot signals at the receiving end, detection of the transmission characteristics of the transmission medium arranged between the first unit and the second unit can be achieved with little technical

|H(f)| - claim 5 - can be determined in a particularly simple manner by evaluating received, frequency-selective pilot signals.

5 The at least one subcarrier of the transmit signal for transmitting the at least one pilot signal is advantageously modulated by a phase modulation method, the pilot signal having a certain reference amplitude - claim 7. Due to this advantageous embodiment, the
10 subcarriers of the transmit signal utilized for the transmission of pilot signals are additionally used - at least partially - for transmission of useful information or, respectively, digital data streams, thus achieving a further improvement in the utilization
15 of the transmission resources of the transmission medium.

In the case of transmit signals having a large number of subcarriers, the transmission medium has virtually
20 identical transmission parameters for adjacent subcarriers. According to a further advantageous embodiment of the method according to the invention, the amplitude-specific and/or phase-specific transmission characteristics of adjacent subcarriers of
25 the incoming transmit signal are averaged for determining the frequency-selective transmission characteristics of the transmission medium - claim 8. Due to the advantageous averaging over the transmission characteristics of a number of subcarriers, arranged
30 adjacently in the frequency domain, of the transmit signal which have been determined, the number of estimated values, thus the accuracy of the channel estimation at the transmitting end, is two-dimensionally increased without the spectral distance
35 to adjacent subcarriers becoming too large.

In the case of fast time variations of the transmission media exhibiting transmission characteristics or,

respectively, in the case of time-variant transmission media, time-selective, amplitude-specific and/or time-selective, phase-specific transmission characteristics of the transmission medium are determined, according to

5 a further advantageous embodiment of the method according to the invention, in which method a number of frequency-selective, amplitude-specific

10066237.061501

and/or frequency-selective, phase-specific transmission characteristics, which are determined over a period of time, are stored in the respective unit and then in each case the average over the stored frequency-selective, amplitude-specific and/or frequency-selective, phase-specific transmission characteristics is formed. Following this, the frequency-specific subcarriers of the transmit signal are adapted to the transmission characteristics of the transmission medium which are averaged over time - claim 9. Due to the averaging over a number of frequency-selective transmission characteristics of the transmission medium which have been determined successively in time, the first derivation of the time variations of the transmission characteristics of the transmission medium is corrected during the detection of the transmission characteristics, which further improves the quality of the channel estimation at the transmitting end and the channel equalization at the transmitting end.

The frequency-selective transmission characteristics which have been determined are advantageously transmitted by the first unit to the second unit and the frequency-specific subcarriers of the further transmit signal are adapted to the transmitted transmission characteristics of the transmission medium in the second unit - claim 10. Due to this advantageous variant of the embodiment, the transmission characteristics of the transmission medium arranged between the first unit and the second unit are only determined in one unit and the result of the determination is transmitted in parameterized form to the second unit as a result of which the expenditure for implementing the channel equalization at the transmitting end is kept low both in the first unit and in the second unit.

According to a further advantageous embodiment, the signal power/noise power ratio S/N is determined for each subcarrier of the transmit signal in the determination of the frequency-selective transmission characteristics and the subcarriers are used for transmitting

09858237, 061501
105190, 76289860

information (dsu, dsd) in dependence on the signal power/noise power ratio S/N determined in each case - claim 14. In the case of a signal power/noise power ratio S/N measured below a limit value, the corresponding subcarrier is advantageously not used for transmitting information - claim 15. Due to the deactivation of the subcarriers having in each case an inadequate signal power/noise power ratio S/N and thus not being usable for information transmission, the transmitting power of the remaining subcarriers used for information transmission can be correspondingly increased. Increasing the transmitting power of the subcarriers used for information transmission further reduces their bit error probability.

Further advantageous embodiments of the method according to the invention can be found in the further claims.

In the text which follows, the method according to the invention will be explained in greater detail with reference to two drawings, in which:

Figure 1 shows a centralized transceiver unit implementing an OFDM transmission method, and Figure 2 shows a decentralized transceiver unit which is connected to a centralized transceiver unit according to figure 1 via the transmission medium "radio channel" and implements an OFDM transmission method.

Figure 1 and figure 2 in this case show in a block diagram a first and second transceiver unit SEE_{1,2} which can be, for example, modular components of transmitting and receiving systems implementing wireless communication networks. In the present exemplary embodiment, the first transceiver unit SEE₁ shown in figure 1 is arranged in a base station BS

representing the center of a radio cell or of a radio area - not shown - and the second transceiver unit SSE2 shown in figure 2 is arranged in a decentralized wireless network terminating unit RNT

09080337.054504

representing a wireless subscriber line unit; figure 2 only shows a wireless network terminating unit RNT as representative of decentralized network terminating units allocated to the base station BS or, respectively, the radio cell. To each decentralized wireless network terminating unit RNT, at least one decentralized communication terminal - not shown - can be connected which can be constructed, for example, as multimedia communication terminal or as ISDN-oriented telephone terminal. The decentralized wireless network terminating units RNT and the decentralized communication terminals connected to them can be connected to a higher-level communication network connected to the base station BS - for example an ISDN-oriented landline network or a broadband-oriented multimedia communication network, not shown, via the wireless transmission medium "radio channel".

The first transceiver unit SEE1 shown in figure 1 has a data input ED to which a digital serial data stream dsd to be transmitted from the higher-level communication network to the decentralized wireless network terminating units RNT is conducted. The data input ED is connected to an input EO of an OFDM transmit unit SOB which is arranged in the first transceiver unit SEE1 and in which a method, already explained in the introduction to the description, for forming an OFDM signal sd having n subcarriers is implemented. The OFDM transmit unit SOB exhibits a modulator MOD which modulates the n subcarriers of the OFDM signal sd and which is connected via n outputs AM1...n and n link lines to n frequency-selective inputs EF1...n, associated with the n subcarriers of the OFDM signal sd, of a transformation unit IFFT for performing a discrete inverse fast Fourier transformation. The transformation unit IFFT is used for generating from the subcarrier-specific modulation symbols or, respectively, transmit symbols SS1...n conducted from a

GR 98 P 5925

- 11a -

modulator MOD to the frequency-selective inputs EF1...n
of the transformation unit IFFT

09060237-061501

a discrete-time OFDM signal. In the OFDM transmit unit SOB, other units, not shown, e.g. parallel/serial converters, digital/analog converters, filter units, amplitude limiters - for converting the discrete-time OFDM signal into the analog OFDM signal sd, for example by adhering to spectrum masks defined for wireless communication networks or mobile radio systems and stipulated by ETSI standardization, are arranged. The OFDM transmit unit SOB is connected via an output AO to an input EH of a radio-frequency transmit unit HS which is connected via an output AH and via an antenna output AS of the first transceiver unit SEE1 to a transmit antenna SA arranged in the external area of the base station BS. The analog OFDM transmit signal sd is amplified by a transmit amplifier, not shown, arranged in the radio-frequency transmit unit HS, is mixed into the radio-frequency or RF band and subsequently transmitted via the transmit antenna SA and via the wireless transmission medium "radio channel" to the decentralized network terminating units RNT arranged in the radio cell of the base station BS - also called the downstream direction.

Furthermore, an OFDM receiving unit EOB is arranged in
25 the first transceiver unit SEE1, which is connected via
an input EO to an output AH of a radio-frequency
receiving unit HE. The radio-frequency receiving unit
HE has an input EH which is connected to a receiving
antenna EA arranged in the external area of the base
30 station BS, via an antenna input ES of the first
transceiver unit SEE1. An OFDM signal su transmitted by
a decentralized network terminating unit RNT to the
base station BS and received at the receiving antenna
EA of the base station BS is down converted to the
35 intermediate-frequency band or, respectively, the
baseband by conversion means, not shown, arranged in
the radio-frequency receiving unit HE and then

GR 98 P 5925

- 12a -

forwarded to the input EO of the OFDM receiving unit
EOB.

0988227.061501

In the OFDM receiving unit EOB, a transformation unit FFT for implementing a discrete fast Fourier transform and having a number of frequency-selective outputs AF1...n is arranged, each frequency-selective output 5 AF1...n being associated with one subcarrier of the received OFDM signal. After previous discretization and digitization with the aid of an analog/digital converter, not shown, the OFDM signal su received and down converted into the intermediate-frequency band or 10 baseband, respectively, is transformed into the frequency domain with the aid of the fast Fourier transform implemented by the transformation unit FFT, i.e., the modulation symbols or receive symbols es1...n of the respective subcarriers contained in the OFDM 15 signal are determined and then forwarded to the corresponding frequency-selective outputs AF1...n of the transformation unit FFT. The outputs AF1...n of the transformation unit FFT are connected to n inputs EM1...n of a demodulator DMOD via n link lines. From the receive 20 symbols es1...n forwarded to the demodulator DMOD from the transformation unit FFT, the corresponding receive code words transmitted via the respective subcarriers are determined with the aid of a demodulation method implemented in the demodulator DMOD. The receive code 25 words which have been determined are then converted with the aid of a parallel/serial converter, not shown, associated with the OFDM receiving unit EOB, into a serial digital data stream deu which is forwarded, for example, to the higher-level communication network via a 30 data output AD of the first transceiver unit SEE1.

The second transceiver unit SEE2, arranged in the decentralized wireless network terminating unit RNT according to figure 2, has an OFDM receiving unit EON 35 which is connected via an input EO to an output AH of a radio-frequency receiving unit HE arranged in the second transceiver unit SEE2. The radio-frequency receiving unit HE is connected via an input EH to a

receiving antenna EA arranged in the external area of the network terminating unit RNT. The OFDM signal sd transmitted by the base station BS to the network terminating unit RNT and received at the receiving antenna EA is down converted into the intermediate-frequency band or, respectively, the baseband by conversion means, not shown, arranged in the radio frequency receiving unit HE, and then forwarded to the input EO of the OFDM receiving unit EON. In the OFDM receiving unit EON, a transformation unit FFT for implementing a discrete fast Fourier transform and exhibiting a number of frequency-selective outputs AF1...n is arranged, each frequency-selective output AF1...n being associated with one subcarrier of the received OFDM signal sd. Using the fast Fourier transform implemented by the transformation unit FFT, the OFDM signal sd received and down converted into the intermediate-frequency band or baseband, respectively, is transformed into the frequency domain after previous discretization and digitization with the aid of an analog/digital converter, not shown, i.e. the modulation symbols or receive symbols es1...n of the respective subcarriers contained in the received OFDM signal sd are determined and then forwarded to the corresponding frequency-selective outputs AF1...n of the transformation unit FFT. The n outputs AF1...n of the transformation unit FFT are connected via n link lines to n inputs EK1...n of a channel estimation unit KS which is connected to corresponding frequency-selective inputs EM1...n of a demodulator DMOD arranged in the OFDM receiving unit EON via n outputs AK1...n and n link lines. The frequency-selective receive symbols es1...n transmitted by the transformation unit FFT to the channel estimation unit KS are forwarded to the inputs EM1...n of the demodulator DMOD. In the channel estimation unit KS, first evaluating means UF are arranged by means of which the frequency-selective

amplitude-specific transmission channel characteristics of the transmission medium "radio channel" are determined from the receive symbols es1...n conducted to the channel

00000000.00000000

estimation unit KS, i.e. the frequency-selective amplitude distortions - also called amplitude response or absolute value of the transfer function of the radio channel $|H(f)|$ - caused by the transmission medium "radio channel" are determined for each subcarrier. Furthermore, the S/N ratio is determined for each subcarrier from the incoming receive symbols es1...n by means of further evaluating means SN arranged in the channel estimation unit KS. From the frequency-selective amplitude response $|H(f)|$ determined and the frequency-selective S/N ratio determined, an information signal is transmitting the results of the determination is generated by signal generating means, not shown, arranged in the channel estimation unit KS, which information signal is forwarded to a control output SA of the OFDM receiving unit EON via an output ASK of the channel estimation unit KS.

The frequency-selective receive symbols es1...n forwarded to the demodulator DMOD from the channel estimation unit KS are converted into the receive code words transmitted via the respective subcarriers by a demodulation method implemented in the demodulator DMOD. From the receive code words determined, a serial/digital data stream ded is then formed with the aid of a parallel/serial converter, not shown, which is associated with the OFDM receiving unit EON, which data stream is conducted to a data output AS of the second transceiver unit SEE2 via an output AO of the OFDM receiving unit EON and is then transmitted, for example, to a decentralized destination communication terminal, not shown, which is connected to the decentralized network terminating unit RNT.

The control output SA of the second transceiver unit SEE2 arranged in the decentralized network terminating unit RNT is connected via a link line VL to a control input SE of an OFDM transmit unit SON arranged in the

GR 98 P 5925

- 15a -

second transceiver unit SEE2, in which transmit unit a
method for

09869237-061601

forming an OFDM signal su to be transmitted in the upstream direction and having n subcarriers is implemented. The OFDM transmit unit SON is connected via an input EO to a data input ES of the second transceiver unit SEE2 to which, for example, a digital serial data stream dsu to be transmitted from a decentralized communication terminal via the wireless transmission medium "radio channel" to the higher-level communication network is conducted. The digital serial data stream dsu is divided into n parallel sub-data streams, or converted in parallel form, respectively, by a serial/parallel converter, not shown, which is associated with the OFDM transmit unit SON, each of the n sub-data streams being allocated to one of the n subcarriers of the OFDM signal. The n parallel sub-data streams are conducted to a modulator MOD arranged in the OFDM transmit unit SON and modulating the n subcarriers of the OFDM signal os, the incoming n sub-data streams being converted into n frequency-selective modulation symbols or transmit symbols ssl...n associated with the n subcarriers of the OFDM signal by a modulation method implemented in the modulator MOD. The n frequency-selective transmit symbols ssl...n formed are forwarded to n outputs AK1...n of the modulator MOD which is connected to n frequency-selective inputs EE1...n of a channel equalizer unit EZ, which are associated with the n subcarriers of the OFDM signal su. The channel equalizer unit EZ has a control input ESS which is connected to the control input SE of the OFDM transmit unit SON and is thus connected to the output ASK of the channel estimation unit KS arranged in the OFDM receiving unit EON via the link line VL.

The channel equalizer unit EZ has means for adapting the transmit symbols ssl...n formed by the modulator MOD and forwarded to the channel equalizer unit EZ to

35

It should be noted that the exemplary embodiment described only represents a functional description of the method according to the invention, i.e. the embodiment of the first and second transceiver unit
5 SEE1,2 described in the exemplary embodiment can also be implemented by alternative variants of the embodiment. For example, the radio-frequency transmitting unit and receiving unit HS, HE arranged in each case in a transceiver unit SEE1,2 can be replaced
10 by a radio-frequency converter unit, not shown, where the respective transmitting and receiving paths are separated by means of a switch, not shown.

In the text which follows, the method according to the
15 invention for maximum utilization of the transmission
resources provided by the wireless transmission medium
"radio channel" is explained in greater detail.

The radio-frequency transmitting and receiving units HS, HE arranged in the first and second transceiver unit SEE1,2 are designed in such a manner that OFDM signals sd, su transmitted in the downstream and upstream direction are transmitted in the TDD (time division duplex) transmission method. In the TDD transmission method, the information to be transmitted between the base station BS and the wireless decentralized network terminating units RNT are alternately transmitted with the aid of signal bursts of a particular extent in time which are sent out in the same frequency range. In this method, the transceiver units SEE1,2 arranged in the network terminating units RNT and in the base station BS are alternately switched to transmit and receive mode. When the TDD transmission method is used, the wireless transmission medium "radio channel" exhibits reciprocal characteristics, i.e. using the OFDM signal sd sent out in bursts in the downstream direction by the base station BS and received by a decentralized network

terminating unit RNT, it is possible to determine or, respectively, estimate the frequency-selective

0966237-061501

amplitude-specific and/or phase-specific transmission channel characteristics of the transmission medium "radio channel" for the OFDM signal s_u to be transmitted in the upstream direction by the decentralized network terminating unit RNT.

According to a first variant of the embodiment of the method according to the invention, a differential phase modulation method - differential phase shift keying, for example a 64 DPSK, is implemented in the modulator MOD arranged in the OFDM transmit unit SOB of the first transceiver unit SEEl. When a differential modulation method is used, no carrier recovery of the received OFDM signal s_d and no precise recovery of the bit clock is required in the subsequent demodulation in the corresponding OFDM receiving unit EON, or, respectively, the demodulator DMOD arranged therein. To provide for a determination of the frequency-selective transmission characteristics of the transmission medium "radio channel", also called channel estimation in the text which follows, at the receiving end, the modulator MOD arranged in the base station BS is designed in such a manner that a particular number of the transmit symbols $s_{1...n}$ present at the n outputs $AM_{1...n}$ of the modulator MOD are designed as pilot symbols with defined reference amplitude, i.e. some of the subcarriers of the OFDM signal s_d to be transmitted in the downstream direction are used for transmitting in each case a pilot tone or pilot signal having a defined reference amplitude. For example, 10% of the subcarriers of the OFDM signal s_d , which can be used for information transmission, are used for transmitting pilot tones.

From the OFDM signal received at the receiving antenna EA of the network terminating unit RNT, the transmitted receive symbols $e_{1...n}$ of the respective subcarriers of the received OFDM signal s_d are determined by the

00000000.00000000

transformation unit FFT arranged in the OFDM receiving unit EON and forwarded to the channel estimation unit KS.

0908237.061501
105190.2228880

From the receive symbols $es1...n$ present at the inputs $EK1...n$ and designed as pilot symbols, the frequency-selective, amplitude-specific transmission characteristics or frequency-selective attenuation characteristics of the transmission medium "radio channel" FK arranged between the base station BS and the decentralized wireless network terminating unit RNT are determined, i.e. the amplitude response or absolute value of the transmission function $|H(f)|$ of the transmission medium "radio channel" FK is determined by the first evaluating means HF arranged in the channel estimation unit KS. With the aid of the information signal is, the transmission characteristics of the transmission medium "radio channel" FK which have been determined are then transmitted to the control input SE of the OFDM transmitting unit SON arranged in the decentralized network terminating unit RNT via the link line VL. Furthermore, the receive symbols $es1...n$ forwarded from the channel estimation unit KS to the n inputs $EM1...n$ of the demodulator DMOD are converted in the OFDM receiving unit EON, with the aid of the differential or, respectively, incoherent demodulation method implemented in the demodulator DMOD, into the receive code words transmitted via the respective subcarriers of the OFDM signal sd , from which code words the serial digital data stream ded conducted to the output AS of the second transceiver unit SEE2 is formed.

According to the invention, the OFDM signal to be transmitted to the base station BS in the upstream direction is generated in dependence on the transmission channel characteristics of the transmission medium "radio channel" determined by the OFDM receiving unit EON and forwarded to the OFDM transmitting unit SON. For this purpose, the digital serial data stream dsu received at the input EO of the

OFDM transmitting unit SON arranged in the second transceiver unit SEE2 and to be transmitted to the base station BS is converted into parallel form and converted into the transmit symbols $ss1...n$ associated with the n subcarriers of the OFDM signal, with the aid of the modulator MOD. The transmit symbols $ss1...n$ formed are forwarded to the n inputs

EE1...n of the channel equalizer unit EZ and adapted to the frequency-selective amplitude-specific transmission channel characteristics of the transmission medium "radio channel" FK, which have been determined, by the correction means 1/HF arranged in the equalizer unit - also called amplitude equalization at the transmitting end. The amplitude equalization at the transmitting end implemented by the correction means 1/HF takes place in such a manner that the transmit symbols ss1...n of the individual subcarriers of the OFDM signal su are multiplied by a factor representing the absolute value of the inverse of the transfer function $H_n(f)$ determined - in this case $1/|H_n(f)|$ for $0 \leq n \leq N-1$, n representing the length of the Fourier transform implemented in the transformation unit IFFT and $H_n(f)$ representing the transfer function of the nth subcarrier of the OFDM signal.

The frequency-selective amplitude equalization according to the invention, at the transmitting end, which has been described, has the effect that all subcarriers of the OFDM signal su transmitted to the base station BS from the decentralized network terminating unit RNT in the upstream direction have the same receive levels or signal amplitude values when they arrive at the receiving antenna EA of the base station BS. Since all subcarriers of the OFDM signal su received in the base station BS have the same receive level, the signal power/noise power ratio S/N is identical for all subcarriers. Thus, all subcarriers can be modulated with the same number of modulation levels at the transmitting end, i.e. with the aid of the OFDM transmitting unit SON arranged in the decentralized network terminating unit RNT or, respectively, with the aid of the modulator MOD arranged there, thus achieving maximum utilization of the transmission resources of the individual subcarriers of the OFDM signal su. For example, if the

decentralized network terminating units RNT are arranged close to the base station BS, the individual subcarriers of the OFDM signal su to be transmitted to the base station BS in the upstream direction can be
5 modulated with the aid of the 64-QAM (quadrature amplitude modulation). As the distance between the decentralized network terminating unit RNT and the base station

T05190*2229920

BS increases, i.e. with increasing attenuation characteristics of the transmission medium "radio channel" FK, the number of modulation levels is reduced. Due to the identical S/N ratio of the subcarrier of the OFDM signal su received in the base station BS, no subcarrier-individual number of modulation levels is required for controlling the demodulation of the received OFDM signal so that the control effort for modulating and demodulating the OFDM signal su is advantageously minimum. By avoiding the requirement of subcarrier-individual number of modulation levels, no additional overhead is generated for transmitting additional control information controlling the subcarrier-individual modulation and demodulation, thus preventing the transmission capacity of the transmission medium "radio channel" from being reduced.

As an alternative, the transmission power of the OFDM signal su to be sent out can be correspondingly reduced instead of increasing the number of modulation levels of the OFDM signal su to be sent in the upstream direction. The transmission power can be lowered, for example, in the radio-frequency transmit unit HS of the decentralized network terminating unit RNT. Lowering the transmission power minimizes the mutual interference of the subcarriers of OFDM signals sd, su sent within a radio cell - also called intercell interference (ICI) - and, as a result, the transmission capacity of the total system arranged within a radio cell is increased.

According to a further advantageous variant of the embodiment of the method according to the invention, the channel estimation unit KS of the OFDM receiving unit EON arranged in the decentralized network terminating unit RNT has further evaluating means SN

for detecting the subcarrier-individual S/N ratios of the respective subcarriers of the received OFDM signal sd. The subcarrier-individual S/N ratios detected in each case with the aid of the further evaluating means 5 S/N are additionally transmitted, in addition to the detected amplitude-specific transmission

characteristics $H(f)$ of the transmission medium FK with the aid of the information signal is via the link line VL to the OFDM transmitting unit SON arranged in the decentralized network terminating unit RNT or, respectively, to the channel equalizer unit EZ arranged there.

In the channel equalizer unit EZ further correction means, not shown here, are arranged by means of which the subcarriers having unfavorable S/N ratios or the subcarriers having an S/N ratio which is measured below a limit value, are deactivated in dependence on the S/N ratios transmitted to the control input ESS, and are thus not used for information transmission. For example, in the case of decentralized network terminating units RNT which are at a large distance from the base station BS, only every second or fourth subcarrier of the OFDM signal s_u to be sent to the base station BS is used for information transmission, the transmission power of the subcarriers used for information transmission being correspondingly increased. Increasing the transmission power of the subcarriers used for information transmission further reduces the bit error probability. Deactivated subcarriers of the received OFDM signal can be detected by simple amplitude calculation in the OFDM receiving unit EON, EOB.

Since the determination of the frequency-selective amplitude-specific transmission characteristics of the transmission medium "radio channel" FK, implemented in the decentralized network terminating unit RNT at the transmitting end, only requires the evaluation of the amplitude value of the pilot symbols or pilot tones transmitted from the base station BS to the decentralized network terminating unit RNT by the channel estimation unit KS arranged in the decentralized network terminating unit RNT, the phase

information of the pilot symbols or pilot tones of the OFDM signals s_d , sent from the base station BS to the decentralized network terminating unit RNT, can be additionally used

for transmitting the digital information dsd. The subcarriers of the OFDM signal sd which transmits pilot symbols or pilot tones can be modulated, for example, with the aid of an absolute or differential phase modulation method with defined reference amplitude as a result of which an advantageous utilization of the transmission capacity of the transmission medium "radio channel" is achieved.

10 The OFDM transmission units SOB, SON arranged in the base station BS or decentralized network terminating unit RNT or, respectively, the modulators MOD arranged there, are designed in such a manner that the subcarriers of the OFDM signals sd, su which are not used for the transmission of pilot tones are modulated with a coherent or absolute modulation method, for example an m-level QAM, since m-level QAM modulation methods can also be used in transmission media with unfavorable S/N ratios.

20 When coherent m-level modulation methods are used, additional means, not shown, for the channel estimation or channel equalization at the receiving end, required according to the prior art, especially for phase equalization, i.e. correction of the phase angles, of the subcarriers received in each case of the received OFDM signal sd, su are required in the corresponding OFDM receiving units EON, EOB arranged in the base station BS and, respectively, the decentralized network terminating unit RNT. To provide for correction of the phase angles of the incoming subcarriers in the OFDM receiving unit EON, EOB, the first subcarrier of the OFDM signal sd, su is transmitted with a defined phase, e.g. $\varphi = 0$ degrees, by the OFDM transmitting unit SOB, SON. The phase of the first subcarrier is rotated by, for example, $\Delta\varphi$ by the transmission medium "radio channel" FK. The second subcarrier arranged closely adjacently to the first subcarrier is also rotated by

$\Delta\phi$ in this process. To restore the original phase angles of the transmitted OFDM signal s_d , s_u , the second subcarrier must be multiplied by the complex factor $e^{-j\Delta\phi}$

09060207.061501

by the correction means arranged in the OFDM receiving unit EON, EOB. The phase shift $\Delta\phi$ of the first subcarrier caused by the transmission medium "radio channel" FK can be detected, and the phase angle of the adjacent second subcarrier of the received OFDM signal can be correspondingly corrected with the aid of the correction means due to the pilot tone with defined transmitting phase transmitted via the first subcarrier. After the correction of the phase angle or phase equalization at the receiving end, the information transmitted via the second subcarrier is decided with the aid of the demodulator. The phase shift of the second subcarrier is determined in dependence on the result of the decision. The phase angle of the third subcarrier is then corrected in the manner described by means of the phase shift of the second subcarrier determined, etc.

According to a further advantageous embodiment of the method according to the invention, the OFDM receiving unit EOB arranged in the base station BS also has a channel estimation unit KS, not shown, by means of which the receive symbols $es_1 \dots n$ transmitted with the aid of the received OFDM signal su are evaluated and from this the frequency-selective, amplitude-specific radio channel characteristics of the transmission medium "radio channel" FK are evaluated in the manner described and are transmitted via a link line, not shown, to a further channel equalizer unit, not shown, which is arranged in the OFDM transmitting unit SOB of the base station BS. Due to this advantageous embodiment, the OFDM signals sd to be transmitted to the decentralized network terminating units RNT from the base station BS in the downstream direction, and the subcarriers contained therein, can also be adapted to the transmission characteristics of the transmission medium "radio channel". The equalization of the amplitude response at the transmitting end achieved in

this manner, both in the downstream direction and in the upstream direction, further improves the utilization of the transmission capacity of the transmission

09858237-061504

medium "radio channel" FK. However, this presupposes that some of the subcarriers of the OFDM signal su to be transmitted from the decentralized network terminating unit RNT to the base station BS are used
5 for transmitting pilot symbols or pilot tones as already described. The modulator MOD arranged in the OFDM transmitting unit SON of the decentralized network terminating unit RNT is advantageously designed in such a manner that the subcarriers of the OFDM signal su
10 which are used for the transmission of pilot symbols are modulated with the aid of a phase modulation method - for example a QPSK modulation method - with defined reference transmit amplitude. By using phase modulation, the pilot symbols or pilot tones
15 transmitted in the upstream direction are at least partially also used for transmitting the digital data stream dsu.

To increase the accuracy of channel estimation in the
20 decentralized network terminating unit RNT and possibly in the base station BS, the subcarriers of an OFDM signal sd, su which in each case transmit pilot tones or pilot symbols can be transmitted with increased power.

25 According to a further variant of the embodiment, the channel estimation at the transmitting end is only performed by the channel estimation unit KS arranged in the decentralized network terminating unit RNT and then
30 the frequency-selective, amplitude-specific transmission characteristics of the transmission medium "radio channel" which have been determined are transmitted in parameterized form to the base station BS or, respectively, the OFDM transmitting unit SOB
35 arranged there. The equalization of the amplitude response of the subcarriers of the OFDM signal sd to be transmitted in the downstream direction from the base station BS is carried out by a channel equalizer unit,

Advantageously, only the changes of the transmission characteristics with time are transmitted to the base station BS and thus the overhead during the transmission of the transmission characteristics is minimized.

In the case of OFDM signals s_d , s_u , having a large number of subcarriers, the transmission medium "radio channel" FK has virtually identical transmission characteristics for adjacent subcarriers. Advantageously, in addition to the directly adjacent subcarriers, the adjoining subcarriers in the frequency range are also taken into consideration for the determination of the frequency-selective transmission characteristics of the transmission medium or the channel estimation at the transmitting end performed in an OFDM receiving unit EON, EOB, i.e. an average is formed over determined transmission characteristics of a number of subcarriers arranged adjacently in the frequency range. The averaging has the advantage that the number of estimated values, and thus the accuracy of the channel estimation at the transmitting end is two-dimensionally increased without the spectral distance from adjacent subcarriers becoming too great.

According to a further advantageous embodiment of the method according to the invention, in the case of radio channels exhibiting a fast change with time - also called time-variant transmission channels or radio channels, the OFDM signals following in time, i.e. those received at the receiving antenna EA within a certain period of time or, respectively, the receive symbols $es1...n$ contained therein, are also taken into consideration in the channel estimation implemented in the channel estimation unit KS. Implementation of this variant of the embodiment requires the storing of the receive symbols $es1...n$ received successively in time

or storing of the frequency-selective transmission characteristics determined in each case, in a memory, not shown, which is arranged in the first or second transceiver unit SEEl, 2. Averaging over a number of
5 receive symbols es1...n in each case

09883227-061E01

belonging to a subcarrier and received successively in time, within the channel estimation at the transmitting end performed in the channel estimation unit KS corrects the first generation of the changes with time of the transmission characteristics of the transmission medium "radio channel" FK during the detection of the transmission characteristics. Advantageously, the subcarriers arranged symmetrically about the current subcarrier in the frequency domain or, respectively, the receive symbols es1...n transmitted via this subcarrier, are taken into consideration during the averaging. As an alternative, the averaging can also be done in the channel equalizer unit EZ of the OFDM transmitting unit SON.

The determination of the frequency-selective, amplitude-specific transmission characteristics of the transmission medium "radio channel" FK, performed with the aid of the evaluating means H(f) in the channel estimation unit KS, also called calculation of the estimated amplitude values, is relatively complex. The amplitude values of all received receive symbols es1...n of an OFDM signal sd are calculated following the calculation rule

$$\sqrt{I^2 + Q^2} = \text{Amplitude}$$

where I is the imaginary part and Q is the real part of a received complex receive signal es1...n. The respective frequency-selective estimated amplitude values can be calculated serially, at least partially, so that the technical complexity or hardware complexity for calculating the estimated amplitude values is kept low.

According to an advantageous embodiment, the estimated amplitude values are calculated from the frequency-

selective receive symbols es1...n received in each case, with the aid of values stored in a table called look-up table. For this purpose, the receive values of the imaginary part I and of the real part Q of a
5 receive symbol es1...n,

which are in each case possible, are combined to form a table address and are stored in the look-up table. Furthermore, to each stored table address, the associated correction factor - $1/|H_n(f)|$ in this case - is allocated and stored in the corresponding table entry. The correction factors allocated to the respective table addresses represent the values by which the respective transmit symbols $ss1...n$ of the OFDM signal s_d, s_u to be sent out are multiplied. The extent or, respectively, number of entries of the look-up table is advantageously kept small if it is restricted to one quadrant of the complex plane, transmit symbols $ss1...n$ having negative imaginary and real part values being inverted before the amplitude equalization at the transmitting end.

According to a further advantageous embodiment, the multiplication of the subcarriers or, respectively, of the transmit symbols $ss1...n$ to be transmitted via the subcarriers, by the correction factor determined - $1/|H_n(f)|$ in this case, is implemented by an addition or, respectively, subtraction with values also stored in a look-up table. This advantageous embodiment further reduces the computing effort for correcting the transmit symbols during the amplitude equalization.

Patent claims

1. A method for transmitting information via a transmission medium exhibiting particular transmission characteristics, with the aid of a multicarrier method, in which the information to be transmitted is transmitted by a first unit to a second unit via the transmission medium by means of a transmit signal exhibiting a number of frequency-specific subcarriers, characterized in that in the first unit (RNT),
- the frequency-selective transmission characteristics of the transmission medium (FK) are determined by means of a further transmit signal (sd) sent out by the second unit (BS) and exhibiting at least one frequency-specific subcarrier, and
 - the frequency-specific subcarriers of the transmit signal (su) are adapted to the frequency-selective transmission characteristics of the transmission medium (FK) which have been determined.
2. The method as claimed in claim 1, characterized in that in the second unit (BS),
- the frequency-selective transmission characteristics of transmission medium (FK) are determined, and
 - frequency-specific subcarriers of a further transmit signal (sd) formed with the aid of a multicarrier method and transmitted from the second unit to the first unit (BS, RNT) are adapted to the frequency-selective transmission characteristics of the transmission medium (FK) which have been determined.

3. The method as claimed in claim 1 or 2, characterized in that the frequency-selective amplitude-specific and/or frequency-selective phase-

00000237.001501

specific characteristics of the transmission medium (FK) are determined as transmission characteristics.

- 5 4. The method as claimed in one of claims 1 to 3, characterized in that the transfer function $H(f)$ of the transmission medium (FK) is determined during the determination of said transmission characteristics of the transmission medium (FK).
- 10 5. The method as claimed in claim 4, characterized in that the amplitude-specific transmission characteristics of the transmission medium (FK) are represented by the absolute value of the transfer function $|H(f)|$ as determined.
- 15 6. The method as claimed in one of the previous claims, characterized in that the frequency-selective transmission characteristics are determined with the aid of the transmit signal (sd, su) transmitted to the first and, respectively, second unit (RNT, BS) via the transmission medium (FK), where at least one subcarrier of the transmit signal (sd, su) is utilized for transmitting at least one pilot signal.
- 20 7. The method as claimed in claim 6, characterized in that the at least one subcarrier of the transmit signal (sd, su) is modulated by a phase modulation method for transmitting the at least one pilot signal, the pilot signal exhibiting a particular reference amplitude.
- 30 8. The method as claimed in one of claims 3 to 7, characterized in that the amplitude-specific and/or phase-specific transmission
- 35

characteristics of adjacent subcarriers of the incoming transmit signal (sd, su) are averaged for determining the frequency-selective transmission characteristics of the transmission medium (FK).

5

9. The method as claimed in one of claims 3 to 8, characterized in that

- time-selective, amplitude-specific and/or time-selective phase-specific transmission characteristics of the transmission medium (FK) are determined, a number of frequency-selective, amplitude-specific and/or frequency-selective, phase-specific transmission characteristics determined over a period of time being stored in the respective unit (RNT, BS) and then in each case the average value over the stored frequency-selective, amplitude-specific and/or frequency-selective, phase-specific transmission characteristics being formed,

10

15

20

- the subcarriers of the transmit signal (su, sd) to be transmitted are adapted to the transmission characteristics of the transmission medium (FK) which are averaged over time.

- 25 10. The method as claimed in claim 1 and one of claims 3 to 9, characterized in that

- the frequency-selective transmission characteristics determined are transmitted by the first unit (RNT) to the second unit (BS), and

30

- that the frequency-specific subcarriers of the further transmit signal (sd) are adapted to the transmitted transmission characteristics of the transmission medium (FK) in the second unit (BS).

35

11. The method as claimed in claim 10, characterized in that only the changes with time of the

transmission characteristics are transmitted by the first unit (RNT) to the second unit (BS).

12. The method as claimed in one of claims 4 to 11,

1998P05925WO

- 33a -

for transmitting pilot signals are modulated by
the same

0966237.061501

number of modulation levels, the number of modulation levels being determined by the noise power/useful power ratio S/N determined for the transmission medium (FK).

5

17. The method as claimed in one of the preceding claims, characterized in that the multicarrier method is implemented by an OFDM (orthogonal frequency division multiplex) transmission method or by a transmission method based on discrete multitone (DMT).

10

18. The method as claimed in one of the preceding claims, characterized in that the transmission medium (FK) is designed as a wireless radio channel or a line or wire connected transmission channel.

15

19. The method as claimed in claim 18, characterized in that the information is transmitted via power supply lines.

20

20. A communication arrangement for transmitting information via a transmission medium according to a method as claimed in one of claims 1 to 19, arranged between a first and second unit and exhibiting particular transmission characteristics, comprising the following which are arranged in the first unit:

25

- conversion means for converting the information to be transmitted into a transmit signal exhibiting a number of frequency-specific subcarriers, with the aid of a multicarrier method, and

30

- transmitting means for transmitting the transmit signal via the transmission medium to the second unit,

35

characterized in that in the first unit (RNT)

- evaluating means (KS) for determining frequency-selective transmission characteristics of the transmission medium (FK), and
- adaptation means (EZ) for adapting the frequency-specific subcarriers of the transmit signal (su) to the frequency-selective transmission characteristics of the transmission medium (FK), which have been determined are arranged.

10

21. The communication arrangement as claimed in claim 20, characterized in that in the second unit (BS),

- conversion means (SOB) for converting the information (dsd) to be transmitted into a further transmit signal (sd) exhibiting a number of frequency-specific subcarriers with the aid of a multicarrier method,
 - evaluating means for determining the frequency-selective transmission characteristics of the transmission medium (FK),
 - adaptation means for adapting the frequency-specific subcarriers of the further transmit signal (sd) to the frequency-selective transmission characteristics of the transmission medium (FK) which have been determined, and
 - transmitting means (HS) for transmitting the transmit signal (sd) via the transmission medium (FK) to the first unit (RNT)
- are arranged.

30

22. The communication arrangement as claimed in claim 20 or 21, characterized in that the evaluating means (KS) are designed in such a manner that the frequency-selective amplitude-specific and/or frequency-selective phase-specific characteristics of the transmission medium (FK) are determined as transmission characteristics.

35

20060327-044504

Abstract

Method and communication arrangement for transmitting information with the aid of a multicarrier method.

5

To transmit information with the aid of a transmit signal (su) exhibiting a number of frequency-specific subcarriers from a first unit (RNT) to a second unit (BS) via a transmission medium (FK), the frequency-selective transmission characteristics of the transmission medium (FK) are determined in the first unit (RNT) and then the subcarriers of the transmit signal (su) are adapted to the transmission characteristics determined. All subcarriers of the transmit signal (su) can be advantageously modulated with the same number of modulation levels as a result of which maximum utilization of the transmission resources of the transmission medium (FK) is achieved.

20 Figure 2

1/2


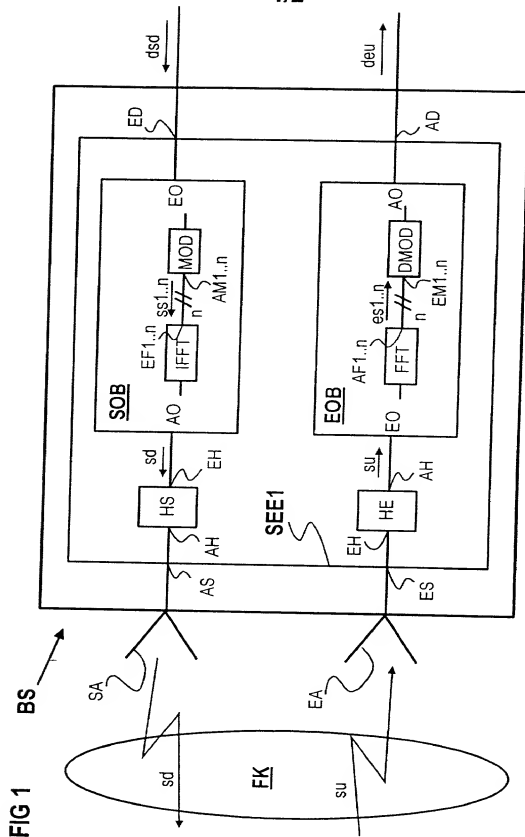


FIG 2

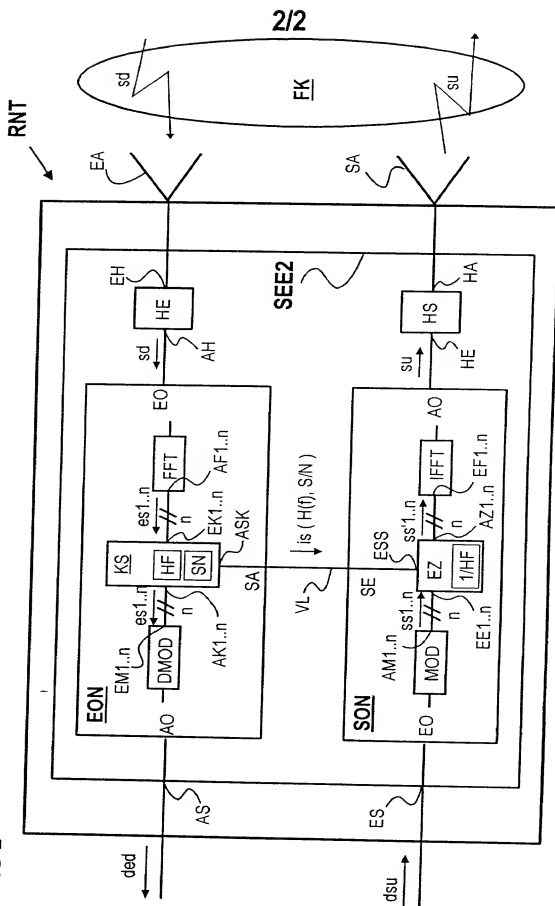

DNR: 2590 / V: 99-1.00 / B: Val

German Language Declaration

Prior foreign applications
Priorität beansprucht

Priority Claimed

19857821.0

DE

15.12.1998

(Number)
(Nummer)

(Country)
(Land)

(Day Month Year Filed)
(Tag Monat Jahr eingereicht)

☒ Yes
Ja

☐ No
Nein

(Number)
(Nummer)

(Country)
(Land)

(Day Month Year Filed)
(Tag Monat Jahr eingereicht)

☐ Yes
Ja

☐ No
Nein

(Number)
(Nummer)

(Country)
(Land)

(Day Month Year Filed)
(Tag Monat Jahr eingereicht)

☐ Yes
Ja

☐ No
Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

PCT/DE98/03865

(Application Serial No.)
(Anmeldeseriennummer)

02.12.1998

(Filing Date D, M, Y)
(Anmeldedatum T, M, J)

(Status)
(patentiert, anhängig,
aufgegeben)

(Status)
(patented, pending,
abandoned)

(Application Serial No.)
(Anmeldeseriennummer)

(Filing Date D,M,Y)
(Anmeldedatum T, M, J)

(Status)
(patentiert, anhängig,
aufgeben)

(Status)
(patented, pending,
abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissenschaftlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden können, und dass derartig wissenschaftlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: (Name und Registrationsnummer anführen)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

(SEE ATTACHED SHEET)

Customer No.

And I hereby appoint

Telefongespräche bitte richten an:
(Name und Telefonnummer)

Direct Telephone Calls to: (name and telephone number)

Ext. _____

Postanschrift:

Send Correspondence to:

Bell, Boyd & Lloyd LLC
Three First National Plaza, 70 West Madison Street, Suite 3300 60602-4207 Chicago, Illinois
Telephone: (001) 312 372 11 21 and Facsimile (001) 312 372 20 98

or

Customer No.

Voller Name des einzigen oder ursprünglichen Erfinders: WOLFGANG ZIRWAS		Full name of sole or first inventor: WOLFGANG ZIRWAS	
Unterschrift des Erfinders <i>W. Zirwas Wolfgang</i>	Datum 1 - 00 30.05.01	Inventor's signature	Date
Wohnsitz GROEBENZELL, DEUTSCHLAND	Residence GROEBENZELL, GERMANY Dex		
Staatsangehörigkeit DE	Citizenship DE		
Postanschrift MITTENWALDER STR.136 82194 GROEBENZELL	Post Office Address MITTENWALDER STR.136 82194 GROEBENZELL		
Voller Name des zweiten Miterfinders (falls zutreffend):		Full name of second joint inventor, if any:	
Unterschrift des Erfinders	Datum	Second inventor's signature	Date
Wohnsitz	Residence		
Staatsangehörigkeit	Citizenship		
Postanschrift	Post Office Address		

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).

17 Holby M. Abern (P47,372), Robert M. Barrett (30,142), Alan L. Barry (30,819), Thomas C. Basso (46,541), Jeffrey H. Canfield (38,404), Robert W. Connors (46,639), Amy J. Gast (41,773), Timothy L. Harney (38,174), Patricia A. Kane (46,446), Michael S. Leonard (37,557), Edward A. Lehman (22,312), Adam H. Masia (35,602), Dante J. Picciano (33,543), Renato L. Smith (45,117), Maurice E. Teixeira (45,646), William E. Vaughan (39,056), Austin Victor (47,154), and all members of the firm of Bell, Boyd & Lloyd LLC.

0906237-051501